

FUEL-VAULT®

HORIZONTAL DOUBLE WALL AST

ULC S601 8,500 and 11,000 L Single and Multi-Compartment Tanks

Fuel-Vault® is the easiest and environmentally safest way to store flammable or combustible liquids.

Easy to use and install, Fuel-Vault's double wall storage system provides superior protection against costly and environmentally damaging leaks or ruptures. Best of all it is manufactured by Westeel to meet or exceed all national environmental and hazardous liquids regulations as well as provide years of worry-free service.

IMPORTANT FEATURES

- Durable all steel construction in a horizontal design
- Consists of a heavy gauge tank shell and ends to prevent deflection
- All exterior surfaces get blasted and finished with a rugged and durable weather-resistant white powder coat
- Heavy duty lifting lugs for easy installation and tank placement
- 100% secondary integral containment with an easily accessible inspection port to identify any problems with the primary tank

OPTIONAL EQUIPMENT

- Fluid transfer, metering equipment and filters
- Locking vent caps, spill boxes, fill limiters, nozzles, bulk hose and high hose retrievers
- Primary and secondary tank gauges
- Skids bases

ACCORDANCE COMPLIANCE


- CAN/ULC-S601-07
- Alberta Energy Regulator Directive 55 Compliant
- Environmental Farm Plan Compliant
- National/Provincial Fire Code Compliant

TYPICAL APPLICATIONS

- Petroleum refueling facilities – fleet, agricultural, industrial, oil and gas, forestry, mining, marine, recreational, rental
- Petroleum processing – oil and gas chemicals, enhancers, additives

OPTIONAL PACKAGE FEATURES

01. Fuel-Vault Model HFV-8500
02. Skid (heavy duty model shown)
03. Step Package
04. 1" Auto Nozzle
05. Nozzle Holder
06. Nameplate ULC S601 Integral Contained
07. Meter Mechanical - Litres
08. Filter 30 Micron
09. Vane Pump - 115V AC
10. 20' Arctic Hose
11. Hose Retractor with Mast
12. Normal Vent - 2" (Pipe / Vent Shipped loose)
13. Spare - 2"
14. Spare / Level Gauge - 2" (Level Gauge Shown - Shipped Loose)
15. Containment Inspection - 2"
16. Fill - 4" comes with 4" x 2" Reducer, 2" Vented Cap
17. Gauge Stick 6'3" (Inside Holder)

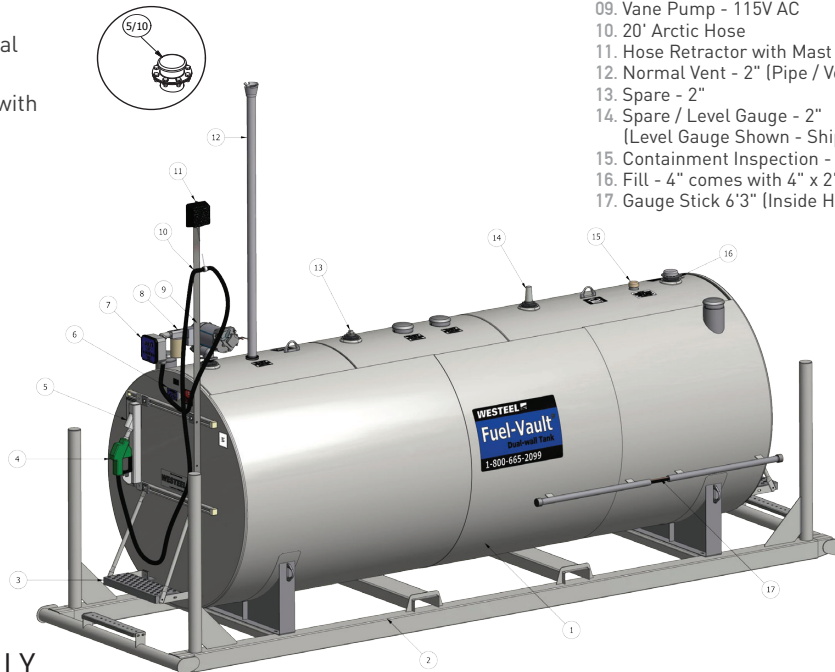

Note: Lift lugs are not to be used to move tank while containing product. Tank must not be elevated >300mm as per Fire Code requirements.

SPECIFICATIONS - TANK ONLY

MODEL NUMBER	PART	NO. OF COMPS.	COMPARTMENT A NOMINAL CAPACITY		COMPARTMENT B NOMINAL CAPACITY		DIAMETER D		LENGTH L		WEIGHT	
			Imp gal	L	Imp gal	L	in	mm	in	mm	lb	kg
HFV-8500	264921HD	1	1880	8500	-	-	64	1625	170	4320	3000	1360
HFV-8500 S5050	264926HD	2	924	4200	924	4200	64	1625	170	4320	3300	1500
HFV-8500 S3070	264927HD	2	550	2510	1295	5890	64	1625	170	4320	3300	1500
HFV-11000	285503HD	1	2420	11000	-	-	64	1625	218	5535	3550	1610
HFV-11000 S5050	285507HD	2	1193	5425	1193	5425	64	1625	218	5535	3850	1750
HFV-11000 S7030	285506HD	2	710	3240	1670	7610	64	1625	218	5535	3850	1750



STORAGE SYSTEMS FOR THE WORLD'S MOST VALUABLE RESOURCES

800-665-2099 ▪ lcs@westeel.com

westeel.com

@westeel_1905

f/Westeel1905

Westeel Head Office Box 792,

Winnipeg, MB, Canada R3C 2N5 ▪ 204-233-7133



Consistent with Westeel policy of continued research and development of our products, we reserve the right to modify or change information contained in this publication without notice. 1015-100