


# ENGINE PERFORMANCE CURVES

ENGINE MODEL D 914 L04  
 RATING STANDARD ISO 14396  
 RATED INTERMITTENT POWER (gross) 77.7 Hp at 2300 rpm  
 MAX. TORQUE 201 lb-ft at 1500 rpm  
 EMISSION CERTIFICATION EPA Tier 3 or 4i/COM 3a

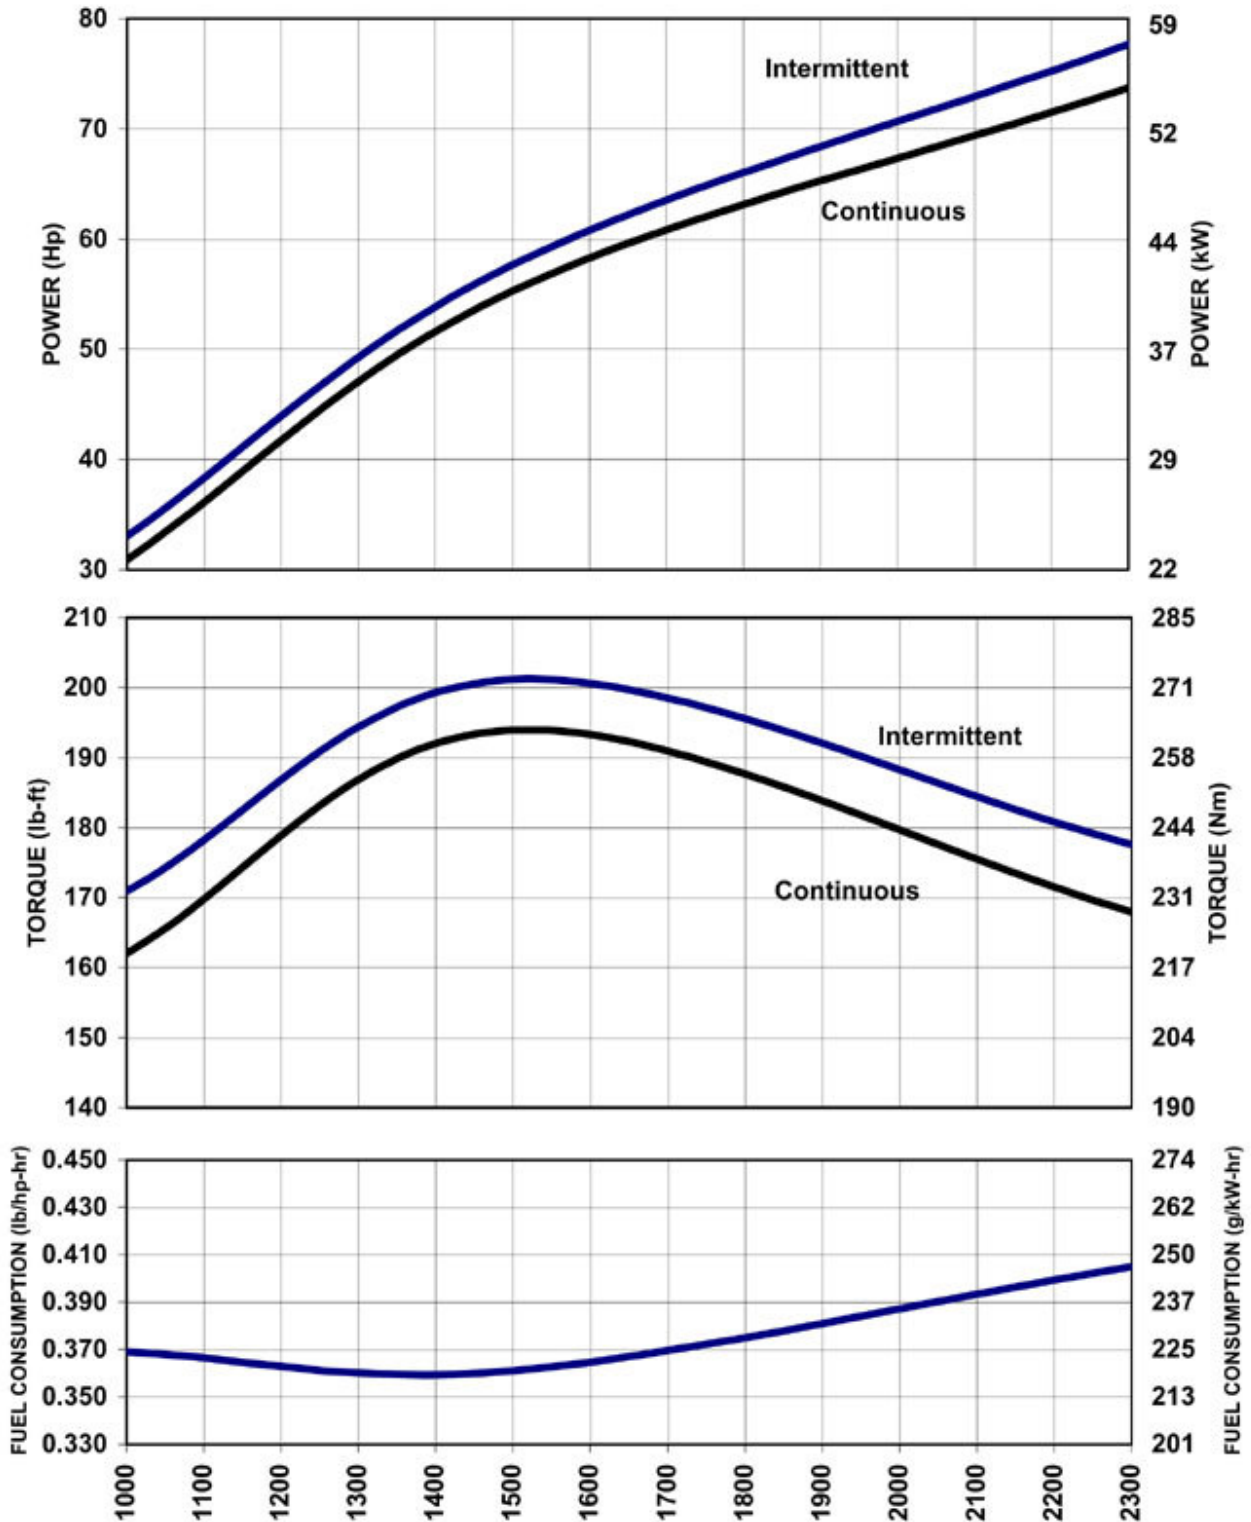

Tolerance: +/- 5% per ISO 14396

Reference conditions: 25 °C (77 °F) 99 kPa (29.31 in. Hg)

Fuel: 40 °C (104 °F) 0.850 kg/l (7.07 lb/gal)

Document: D914L04 T4i

Date: 11 Dec, 2007

Name: B. Wilson

Curves are based on current data and are subject to change without notice.