


V-100
BATCH TOWER
24"OD x 16'-0" S/S
MAWP: 720PSI
DT: 100°F
C.A: 1/16"
SN: S-2499

V-200
FUEL GAS SCRUBBER
SIZE: 6"OD x 24"S/S
MAWP: 285PSI
DT: 650°F
c/w INTEGRAL HLSD

BH-100
BUILDING HEATER
MAKE: CCI THERMAL
SIZE: 12"x24"
12VDC START c/w 30' START CABLE
PROTECTION GRILL, HOOD & VENT

BILL OF MATERIALS		
TAG	QTY	DESCRIPTION
PCV-100	1	CONTROL VALVE, SAMSON, 3" CL600
FI-100	1	INLINE FILTER, GENIE
PI-100	1	PRESSURE INDICATOR
TW-101	1	THERMOWELL, 3/4" x 1/2", 316SS
TI-101	1	TEMPERATURE GAUGE, 0-250°F
PI-101	1	PRESSURE INDICATOR, 0-60 PSI
PSV-200	1	PRESSURE RELIEF VALVE, TAYLOR, SET @ 150 PSI
PRV-200	1	PRESSURE REGULATOR, CVS, 627
PI-200	1	PRESSURE INDICATOR, 0-300 PSI
LG-400	1	LEVEL GAUGE
PC-100	1	PRESSURE CONTROLLER, 4150
PRV-300	1	PRESSURE REGULATOR, FISHER, 67 CFR, NACE

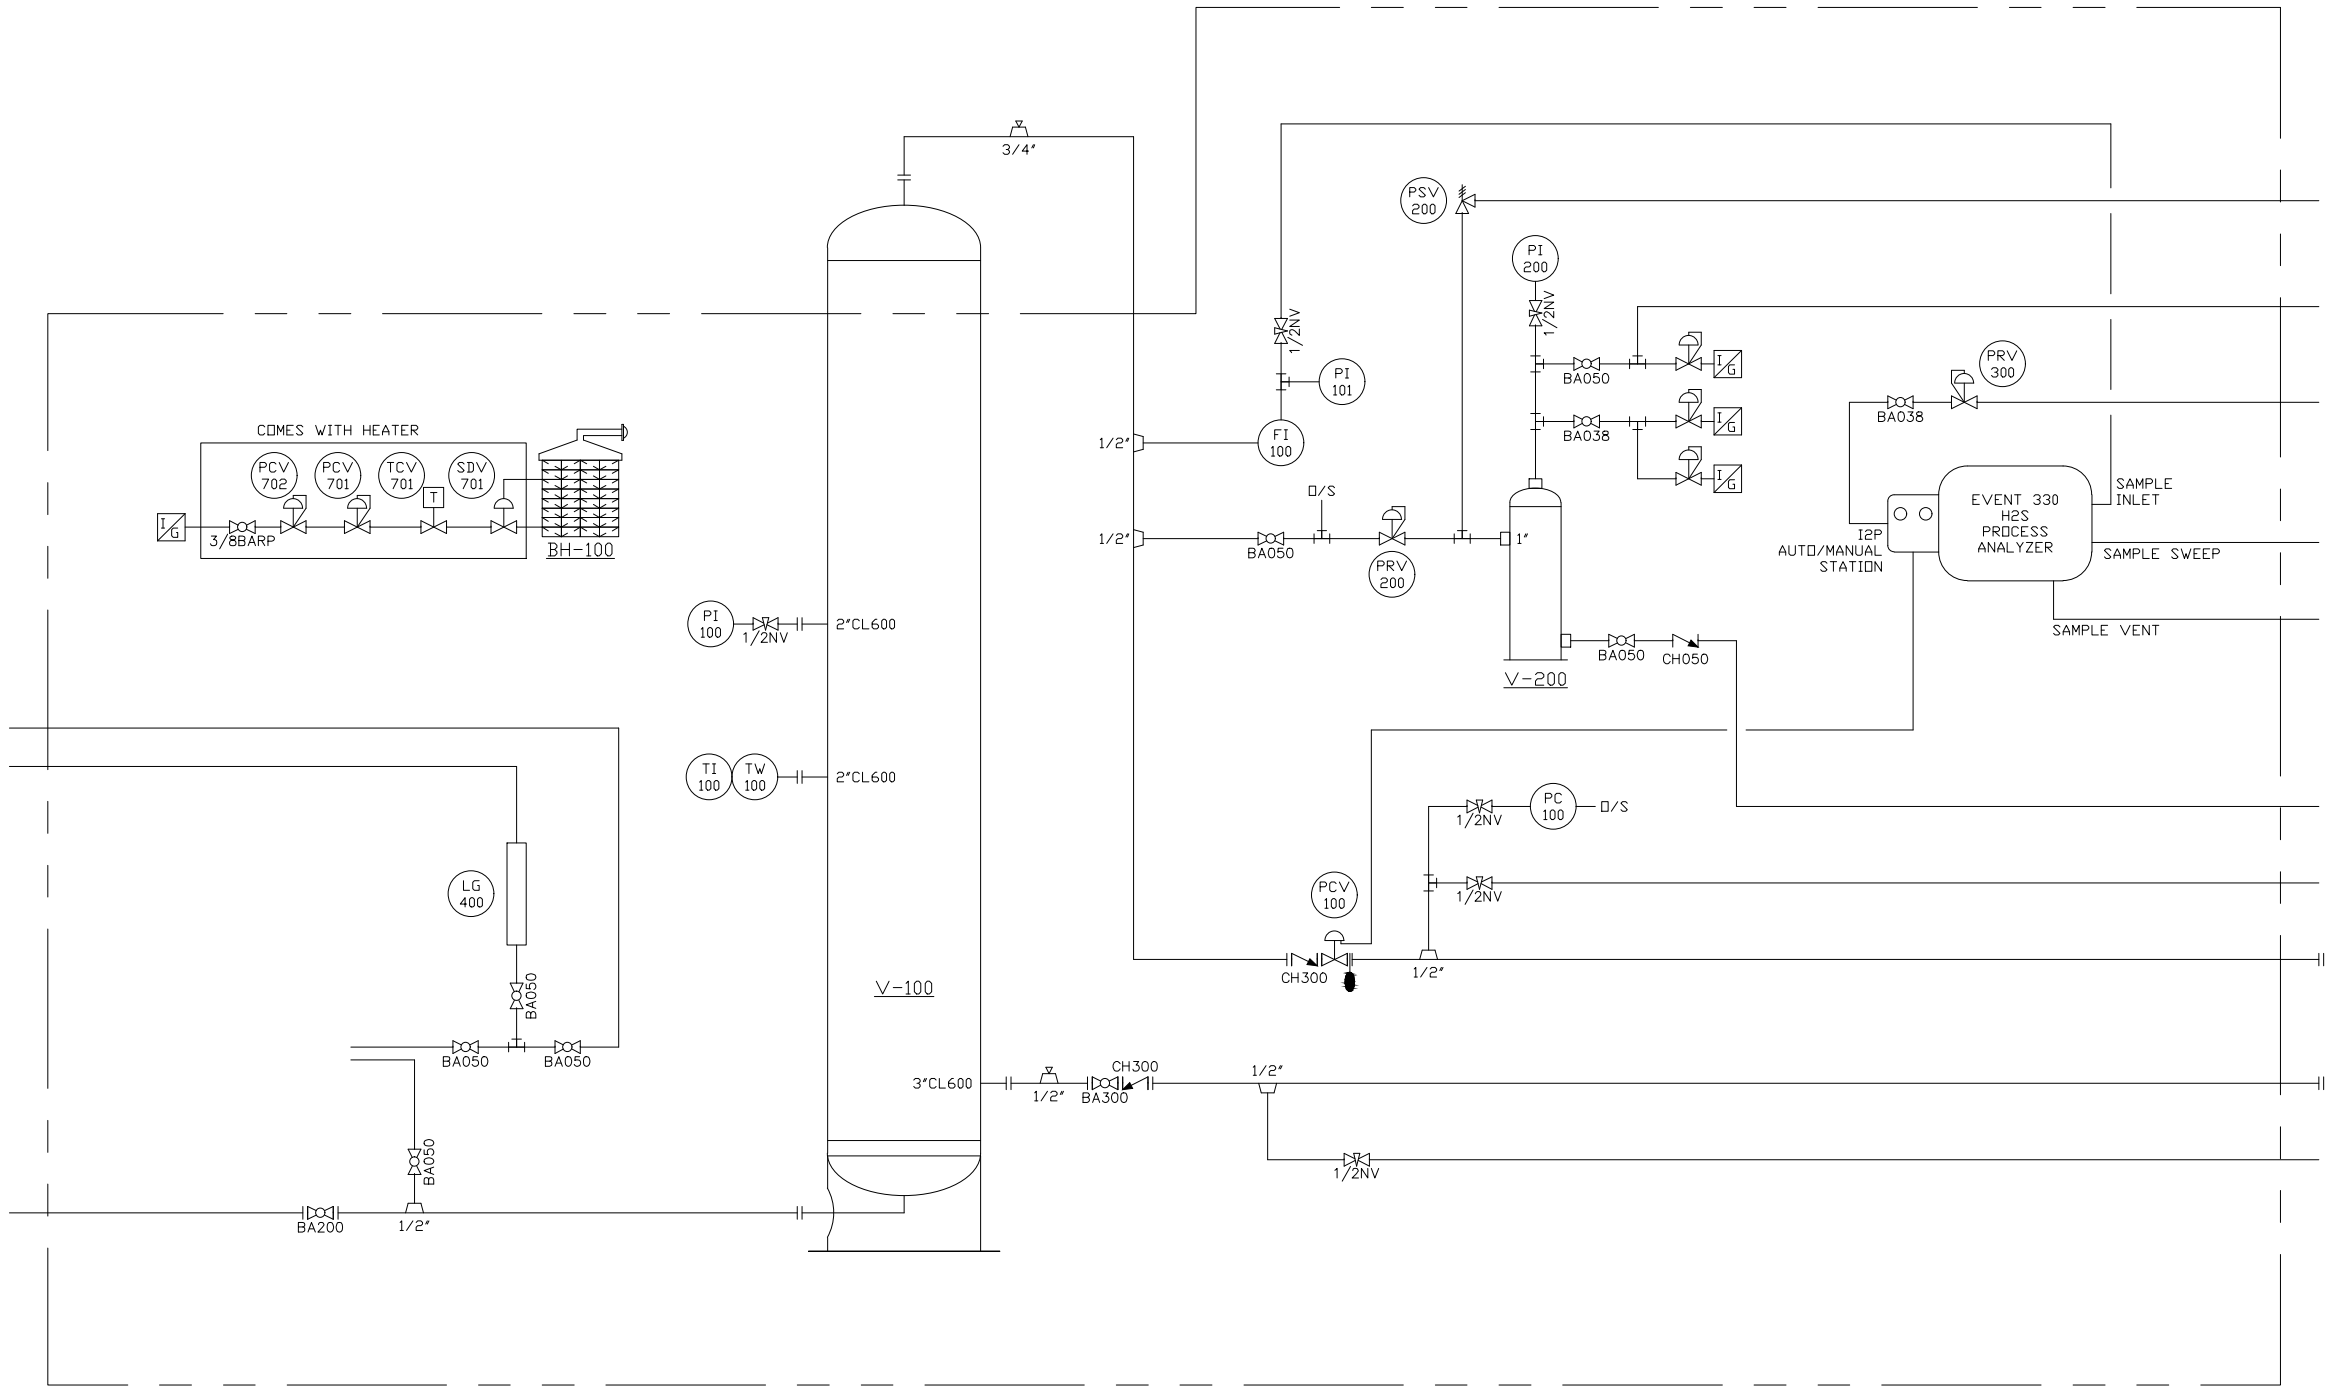

0	22-03-2025	AS BUILT	DF	-	-
REV	DD/MM/YYYY	REVISION	BY	CHK	APP



CLIENT: -		FC-16724	
		24" BATCH TOWER	
		PIPING & INSTRUMENTATION	
PART#	DWG#	REV	
XXXX	FC-16724	0	