



ITEM #	SUPPLIER	QTY	DESCRIPTION	MANUFACTURER	ACCESSORIES & DESCRIPTION
1	R	1	Storage Shelving	Olympic	Lot as shown on Drawing
2	R	1	Reaching Cooler	Habco	SE46
3	R	1	Reaching Freezer	Habco	SF46
4	R	1	Two Compartment Sink	Quest	with Drainboard
4a	R	1	Pre-rinse Faucet with 12 Add-on Faucet	T&S	TSBB-0133B-ADF-12B
5	R	1	Undercounter Dishwasher	Moyer Diebel	501HT
6	R	1	Pot Rack	Quest	48" Double
7	R	1	HD Range	Quest	QGR2 with 60B and 36" Frytop with 2 Standard Ovens Below, Low Back, Mobile
7a	R	1	Gas Hose for Above	Dormont	DOR1675KITS48
8	R	1	Exhaust Canopy	Quest	QLO with Insulated Back and Side, with 2 Lights and Plain Cladding
9	O	1	Fire Suppression System	Others	
10	R	1	Hand Sink	Polar	Wallmount
11	O	1	Paper and Soap Dispenser	Others	
12	R	2	SS Wall Shelves	Quest	4
13	R	1	Pass Thru	Quest	SS
14	R	1	SS Worktable	Quest	5' with Undershelf, Mobile
15	R	1	SS Worktable	Quest	with Prep Sinks, Undershelf and Backriser
15a	R	1	Pre-rinse Faucet with 12 Add-on Faucet	T&S	TSBB-0133B-ADF-12B
16	R	2	Caraffe	Bunn	AAPE22B
17	R	1	SS Worktable	Quest	with Backriser and Undershelf
18	R	1	Coffee Maker	Bunn	CW 15 APS
19	R	1	Reaching Cooler	Habco	SE28
20	R	1	Toaster	Habco	TPT 208

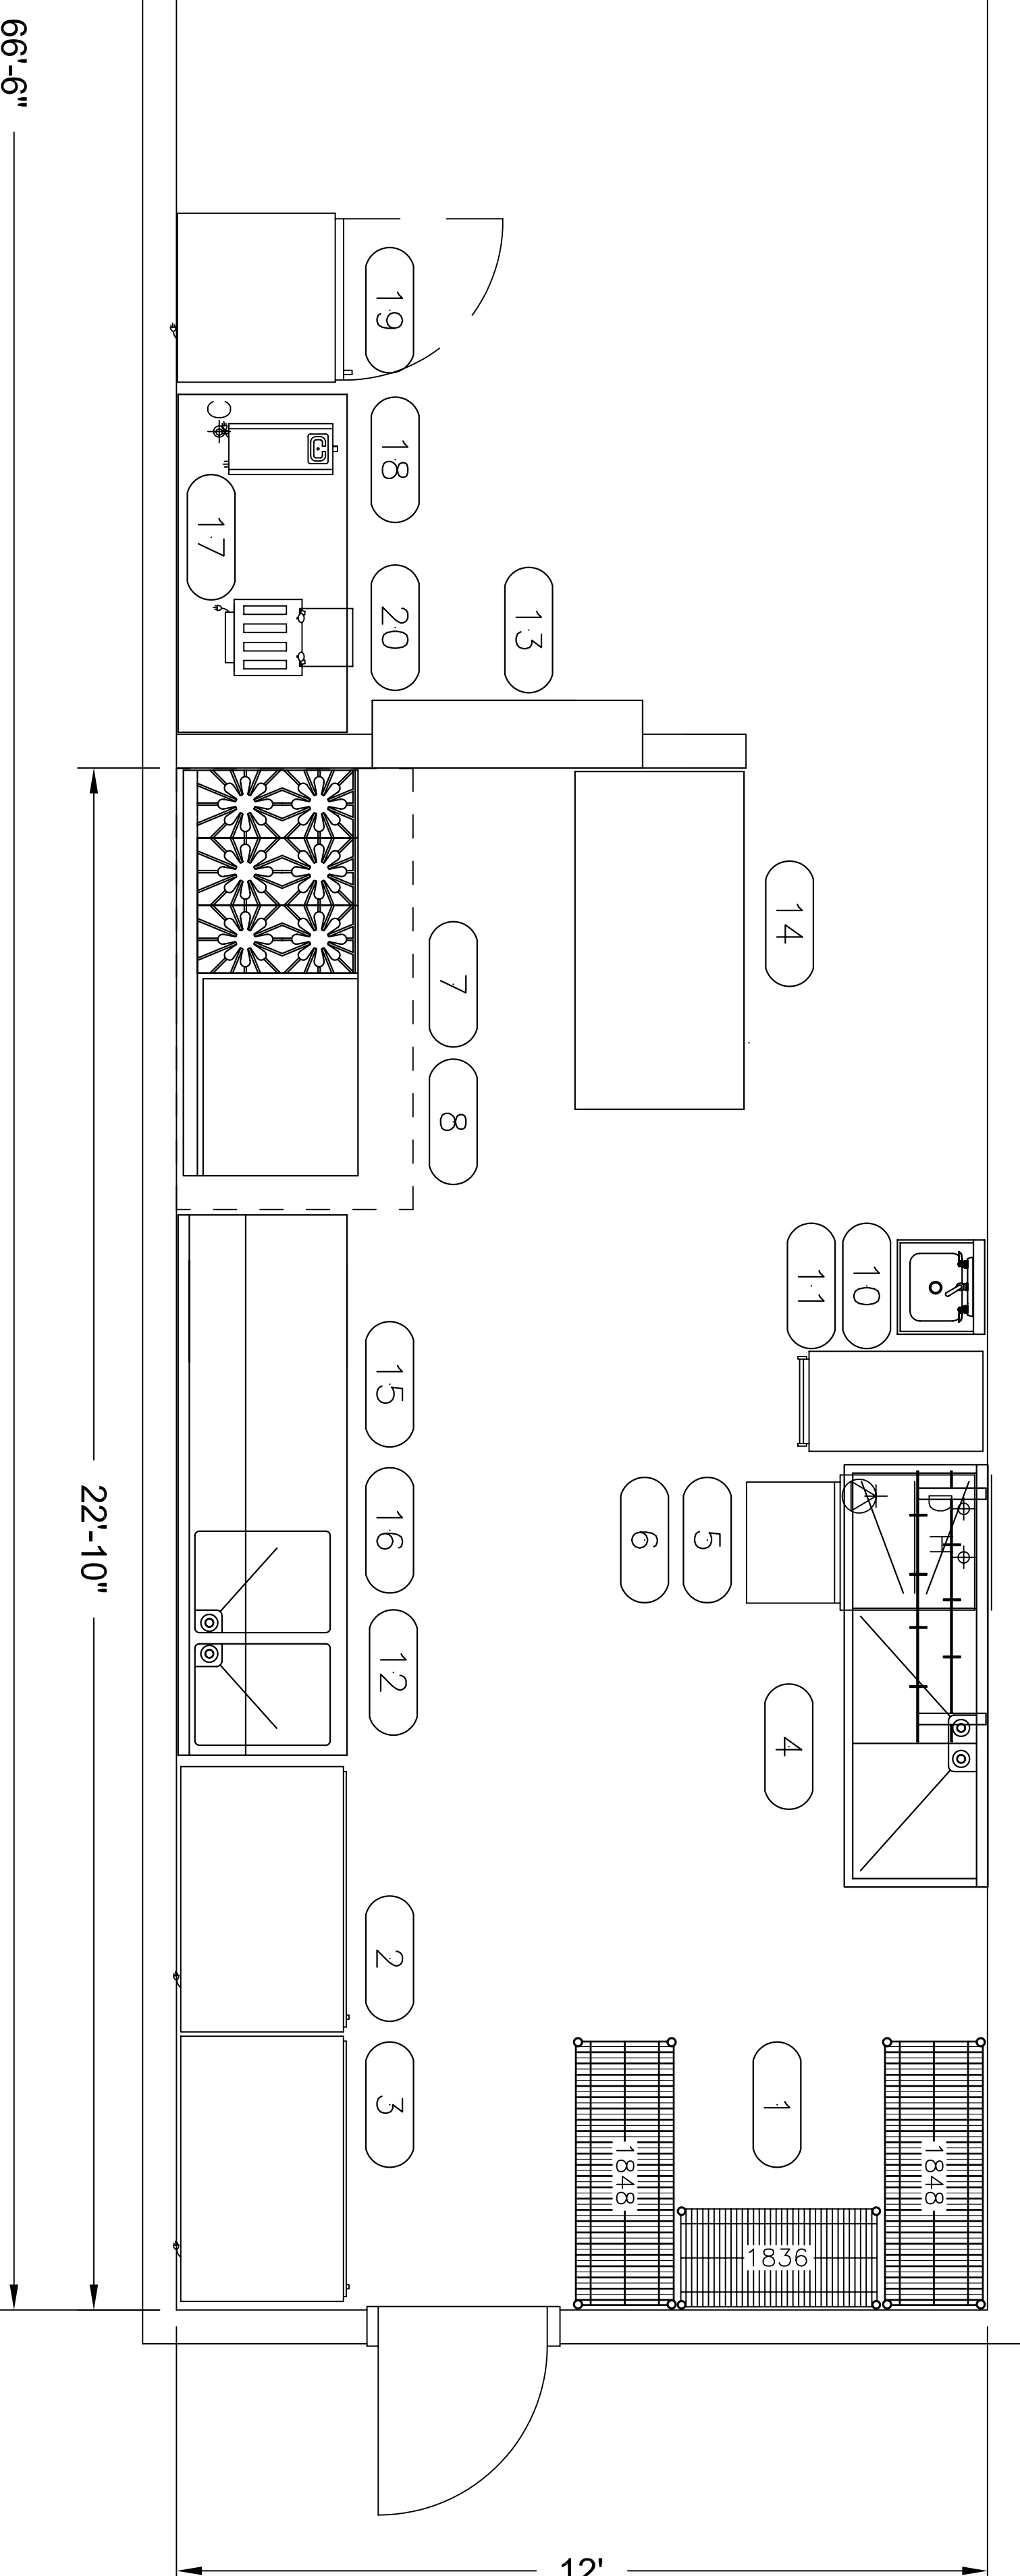

**GENERAL NOTES:**

- ALL EQUIPMENT SET IN PLACE BY KITCHEN EQUIPMENT CONTRACTOR. LEVELED, FLASHED AND MADE READY FOR FINAL CONNECTION BY PLUMBER, ELECTRICIAN, GAS, STEAM AND OTHER TRADES.
- ALL SUBTRADES TO CHECK WITH KITCHEN EQUIPMENT CONTRACTOR TO VERIFY FINAL ROUGH-IN DATA BEFORE COMMENCING WORK.
- A MINIMUM CLEAR OPENING OF 3FT. WIDE X 7FT. HIGH MUST BE PROVIDED BY ENTRY AND PLACING OF KITCHEN EQUIPMENT.
- CONDENSERS REQUIRED FOR INSULATED REFRIGERATION LINES AND SLEEVES THROUGH RESPONSIBILITY OF KITCHEN EQUIPMENT CONTRACTOR.
- ELECTRICIANS TO SUPPLY SEPARATELY FUSED CIRCUIT, AVAILABLE 24 HOURS PER DAY FOR CONTROL CIRCUIT ON EXHAUST VENTILATOR, AND INTERWIRE SEPARATE COMPONENTS.
- ELECTRICIANS TO CONNECT WIRING TO REFRIGERATOR CONDENSING UNITS, INCLUDING CONTROL WIRING.
- PLUMBER TO ENSURE A PRESSURE REDUCING VALVE, SET AT 20 TO 30 LBS. PER SQUARE INCH FLOW PRESSURE, IS INSTALLED IN HOT WATER LINE TO THE BOOSTER AND THAT AN AIR CUSHION EXPANSION CHAMBER IS INSTALLED BETWEEN THIS PRESSURE REDUCING VALVE AND THE DISPHASER, ALSO PLUMB IN VENTILATOR GAS THE VENTILATION SYSTEM WILL BE EXHAUSTING 2100 CFM OF AIR IN ORDER THAT THE VENTILATION WORKS AT 100% EFFICIENCY. IT IS ADVISABLE THAT YOU WORK WITH YOUR AIR CONDITIONING OR HEATING CONTRACTOR TO INSTALL A MAKE-UP AIR UNIT IN YOUR PREMISES.
- ALL SERVICES FOR EQUIPMENT SUPPLIED BY OTHERS/OWNERS SHOULD BE CONFIRMED BY OWNERS.
- PLUMBING CONTRACTOR TO PROVIDE WATER SUPPLY AND WASTE SERVICES FOR REFRIGERATION EVAPORATIVE WATER COOLER, PROVIDE BACK FLOW PREVENTOR ASSEMBLY ON WATER SUPPLY LINE, PLUMBING CONTRACTOR TO MAKE ALL FINAL CONNECTIONS, CONDENSATE LINES MUST BE SIZED AND INSTALLED AT THE IN FREEZERS REQUIRE HEAT TAPE AND INSULATION, REFRIGERATION CONTRACTOR SHALL FURNISH AND INSTALL ALL INTERCONNECTING REFRIGERANT PIPING UNLESS NOTED OTHERWISE.
- PLUMBING CONTRACTOR TO BRING ADEQUATELY SIZED GAS LINE DOWN, WHERE SHOWN, INSTALL GAS SAFETY SHUT-OFF VALVE (SUPPLIED BY RFE), AND THEN HOOK-UP ITEM 7.
- GENERAL CONTRACTOR TO SUPPLY AND INSTALL GUMBOKES AND REFRIGERATION SLEEPERS ON ROOF.
- RUSSELL FOOD EQUIPMENT IS NOT RESPONSIBLE FOR PRODUCTION OR FAILURE OF THE REFRIGERATION SYSTEM.

DATE	APPROVED
REVISIONS	
SUPPLIER CODE	
R	RUSSELL FOOD EQUIPMENT
O	BY OTHERS
E	EXISTING
F	FUTURE ITEM
M	MILLWORK
Me	MECHANICAL CONTRACTOR

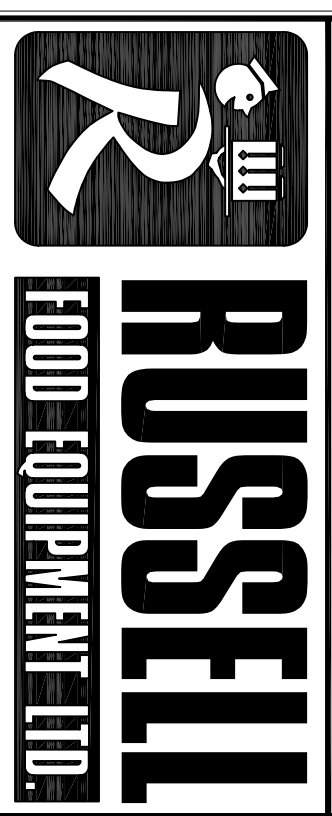

1025-10TH STREET EDMONTON, AB T6H 1H6  
 PHONE: 780-423-4221 FAX: 780-428-8624  
 WWW.RUSSELLFOOD.COM

TEL NO.: 423-4221 DATE: 07/08/10  
 DESIGN: Kelly Keeling BRANCH: EDMONTON  
 CHECK: SCALE: 1/2" = 1'  
 FILE NO.:  
 PROJECT: Rev 1

Dentle Industries Ltd. c/o Auburn  
 10 Man Camp  
 Edmonton, AB