


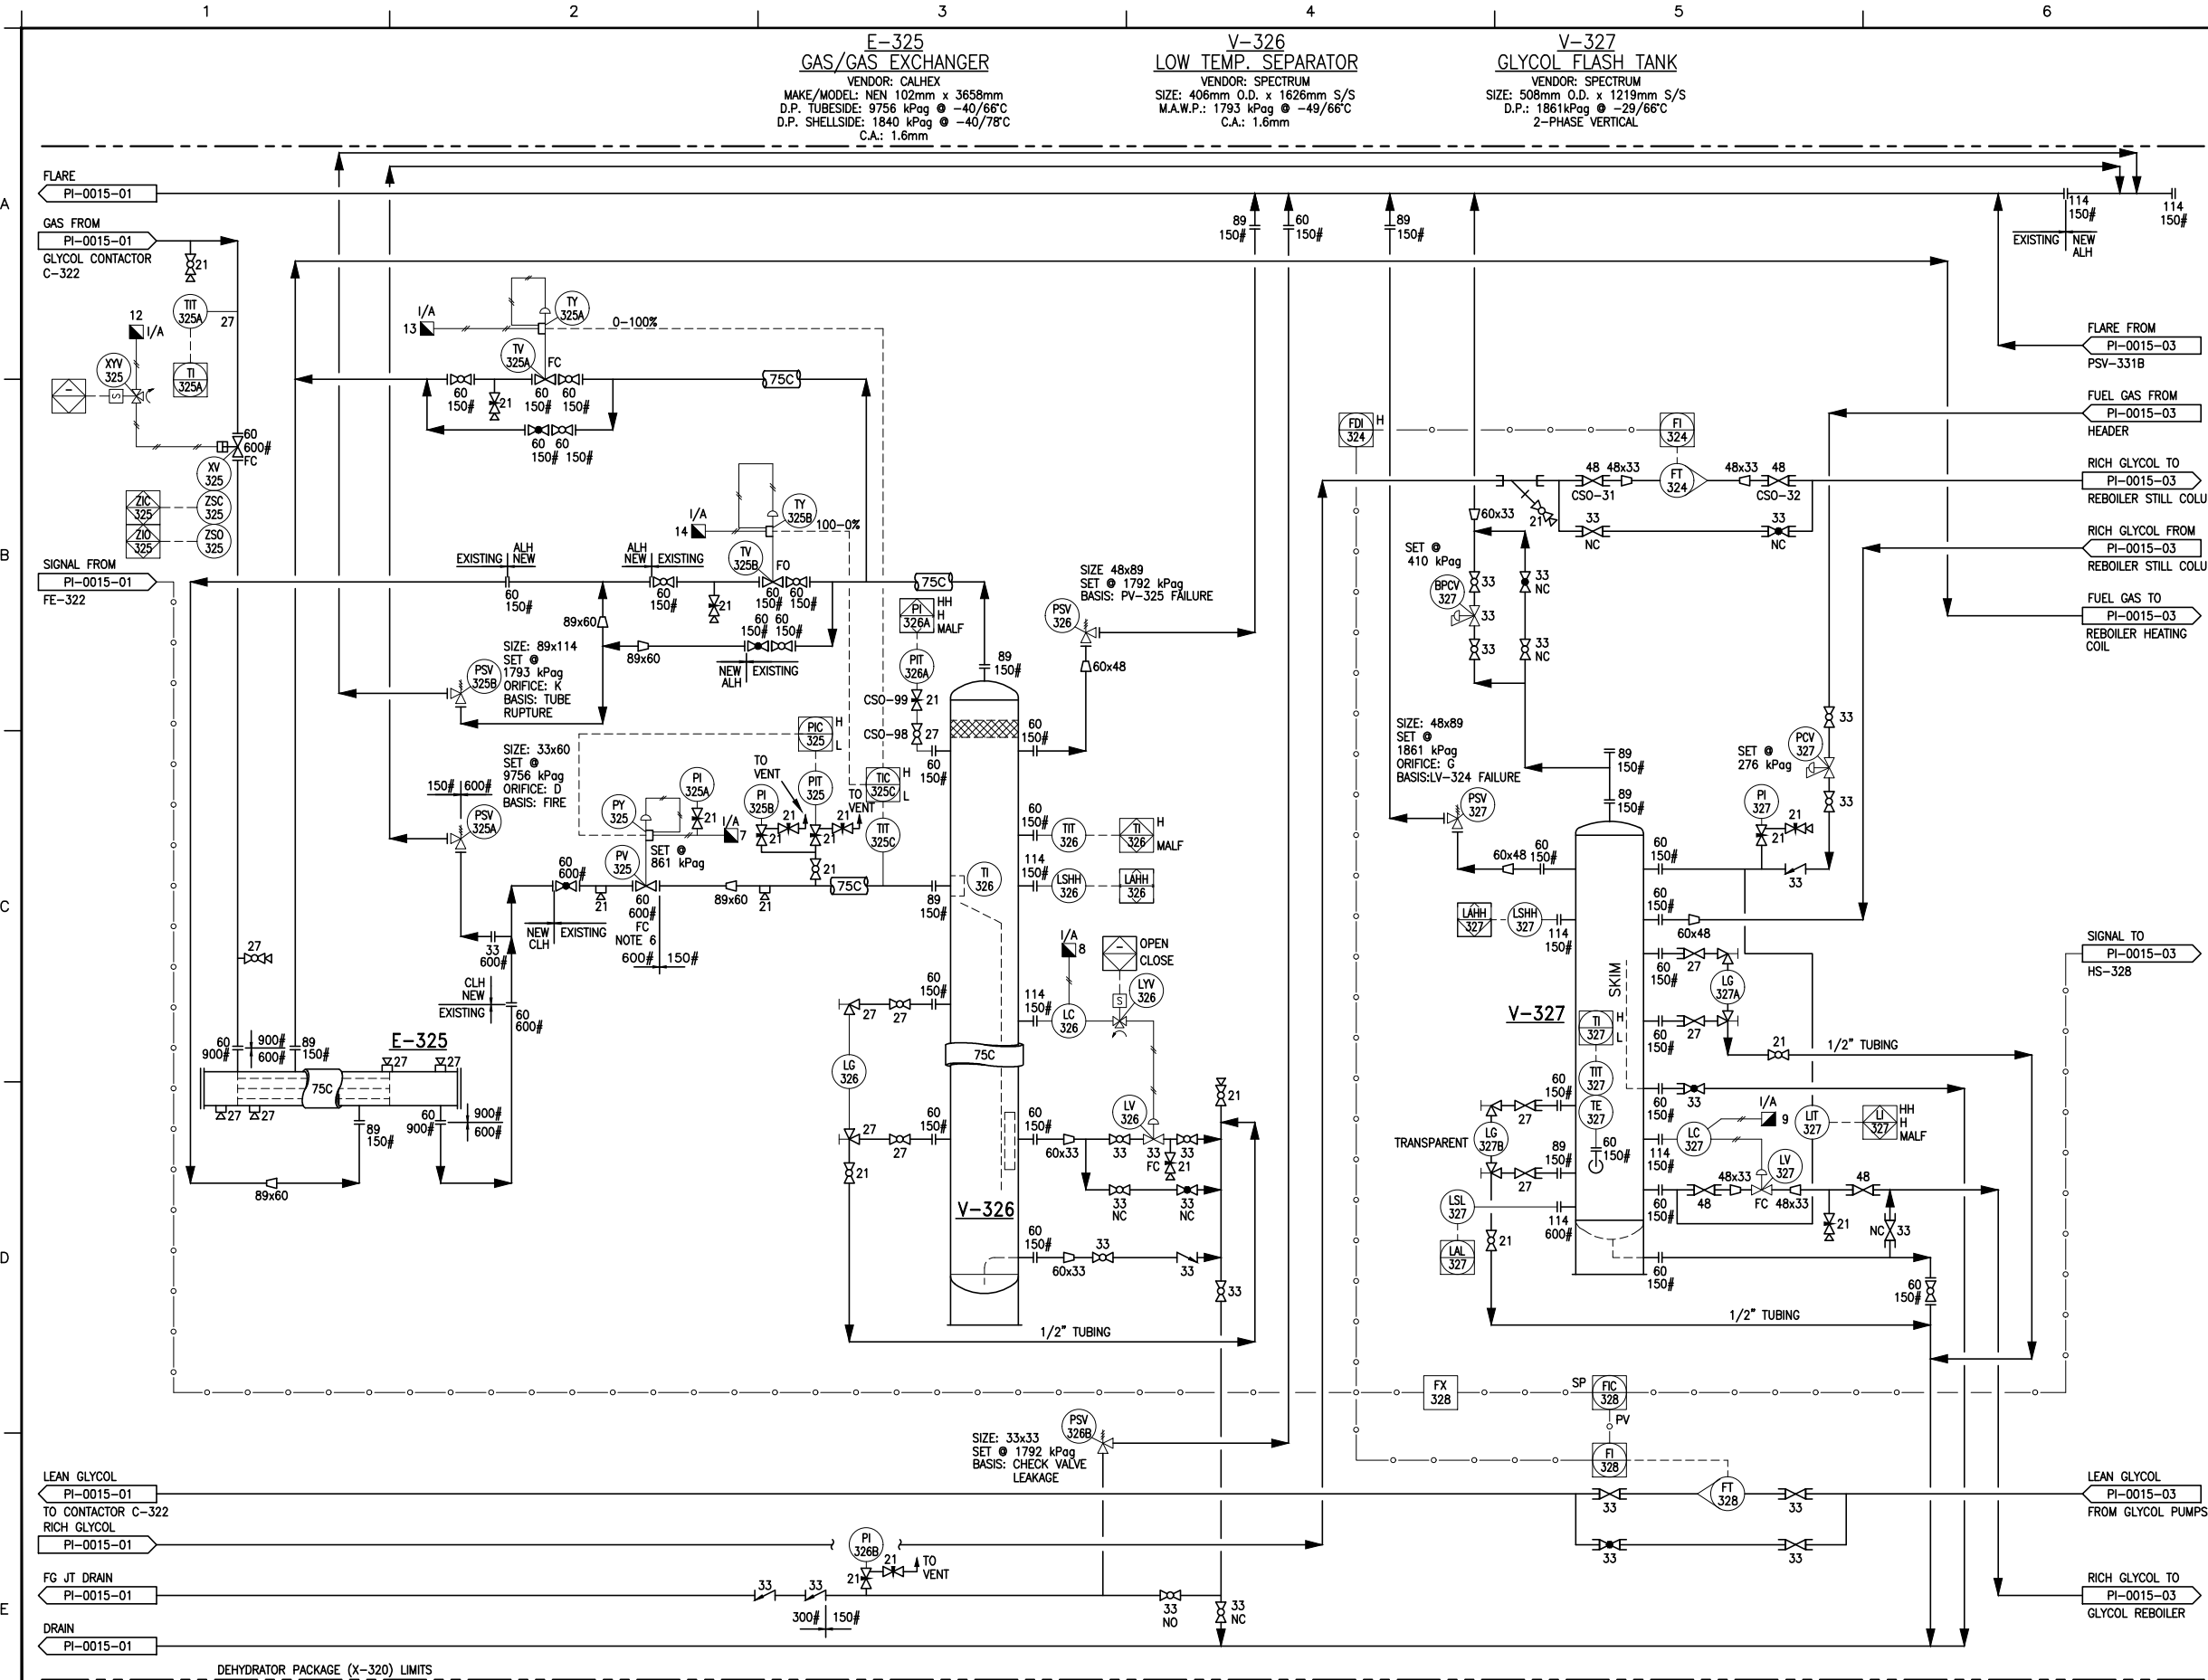

- NOTES**
- * NOTES RENUMBERED TO INCORPORATE TYPICAL PIPING NOTES 1 TO 4.
 - 1. ALL PROCESS & INSTRUMENT VENTS SHALL BE AT LEAST 500mm FROM ANY ELECTRICAL CONNECTION OR OUTLET.
 - 2. INSULATE ALL A/G PIPE AND FLANGES WHERE SPECIFIED WITH FIBERGLASS INSULATION AND ALUMINIUM CLADDING.
 - 3. ▲ DENOTES VENDOR SUPPLIED ITEMS WHERE O/S OF PACKAGED UNITS.
 - 4. FIELD TO SUPPLY VENTS AND DRAINS AS REQUIRED.
 - 5. VENDOR PACKAGE P&ID WILL BE STAMPED BY VENDOR, FOR PURPOSE OF THIS DRAWING, ENGINEERING STAMP VERIFIES THAT THE VENDOR PACKAGE DRAWING (AS SHOWN) IS IN COMPLIANCE WITH THE HUSKY ENERGY HAZOP MEETING REQUIREMENTS AND RECOMMENDATIONS.
 - 6. PROCESS RECOMMENDS CHANGING TRIM SIZE FROM 1/4" TO 3/8". THIS TRIM SIZE CHANGE IS TO MAKE THE VALVE OPERATE AT 73% OPEN INSTEAD OF 92% OPEN.

ENGINEERING COMPANY PERMIT STAMP				REGISTERED PROFESSIONAL ENGINEER STAMP			