


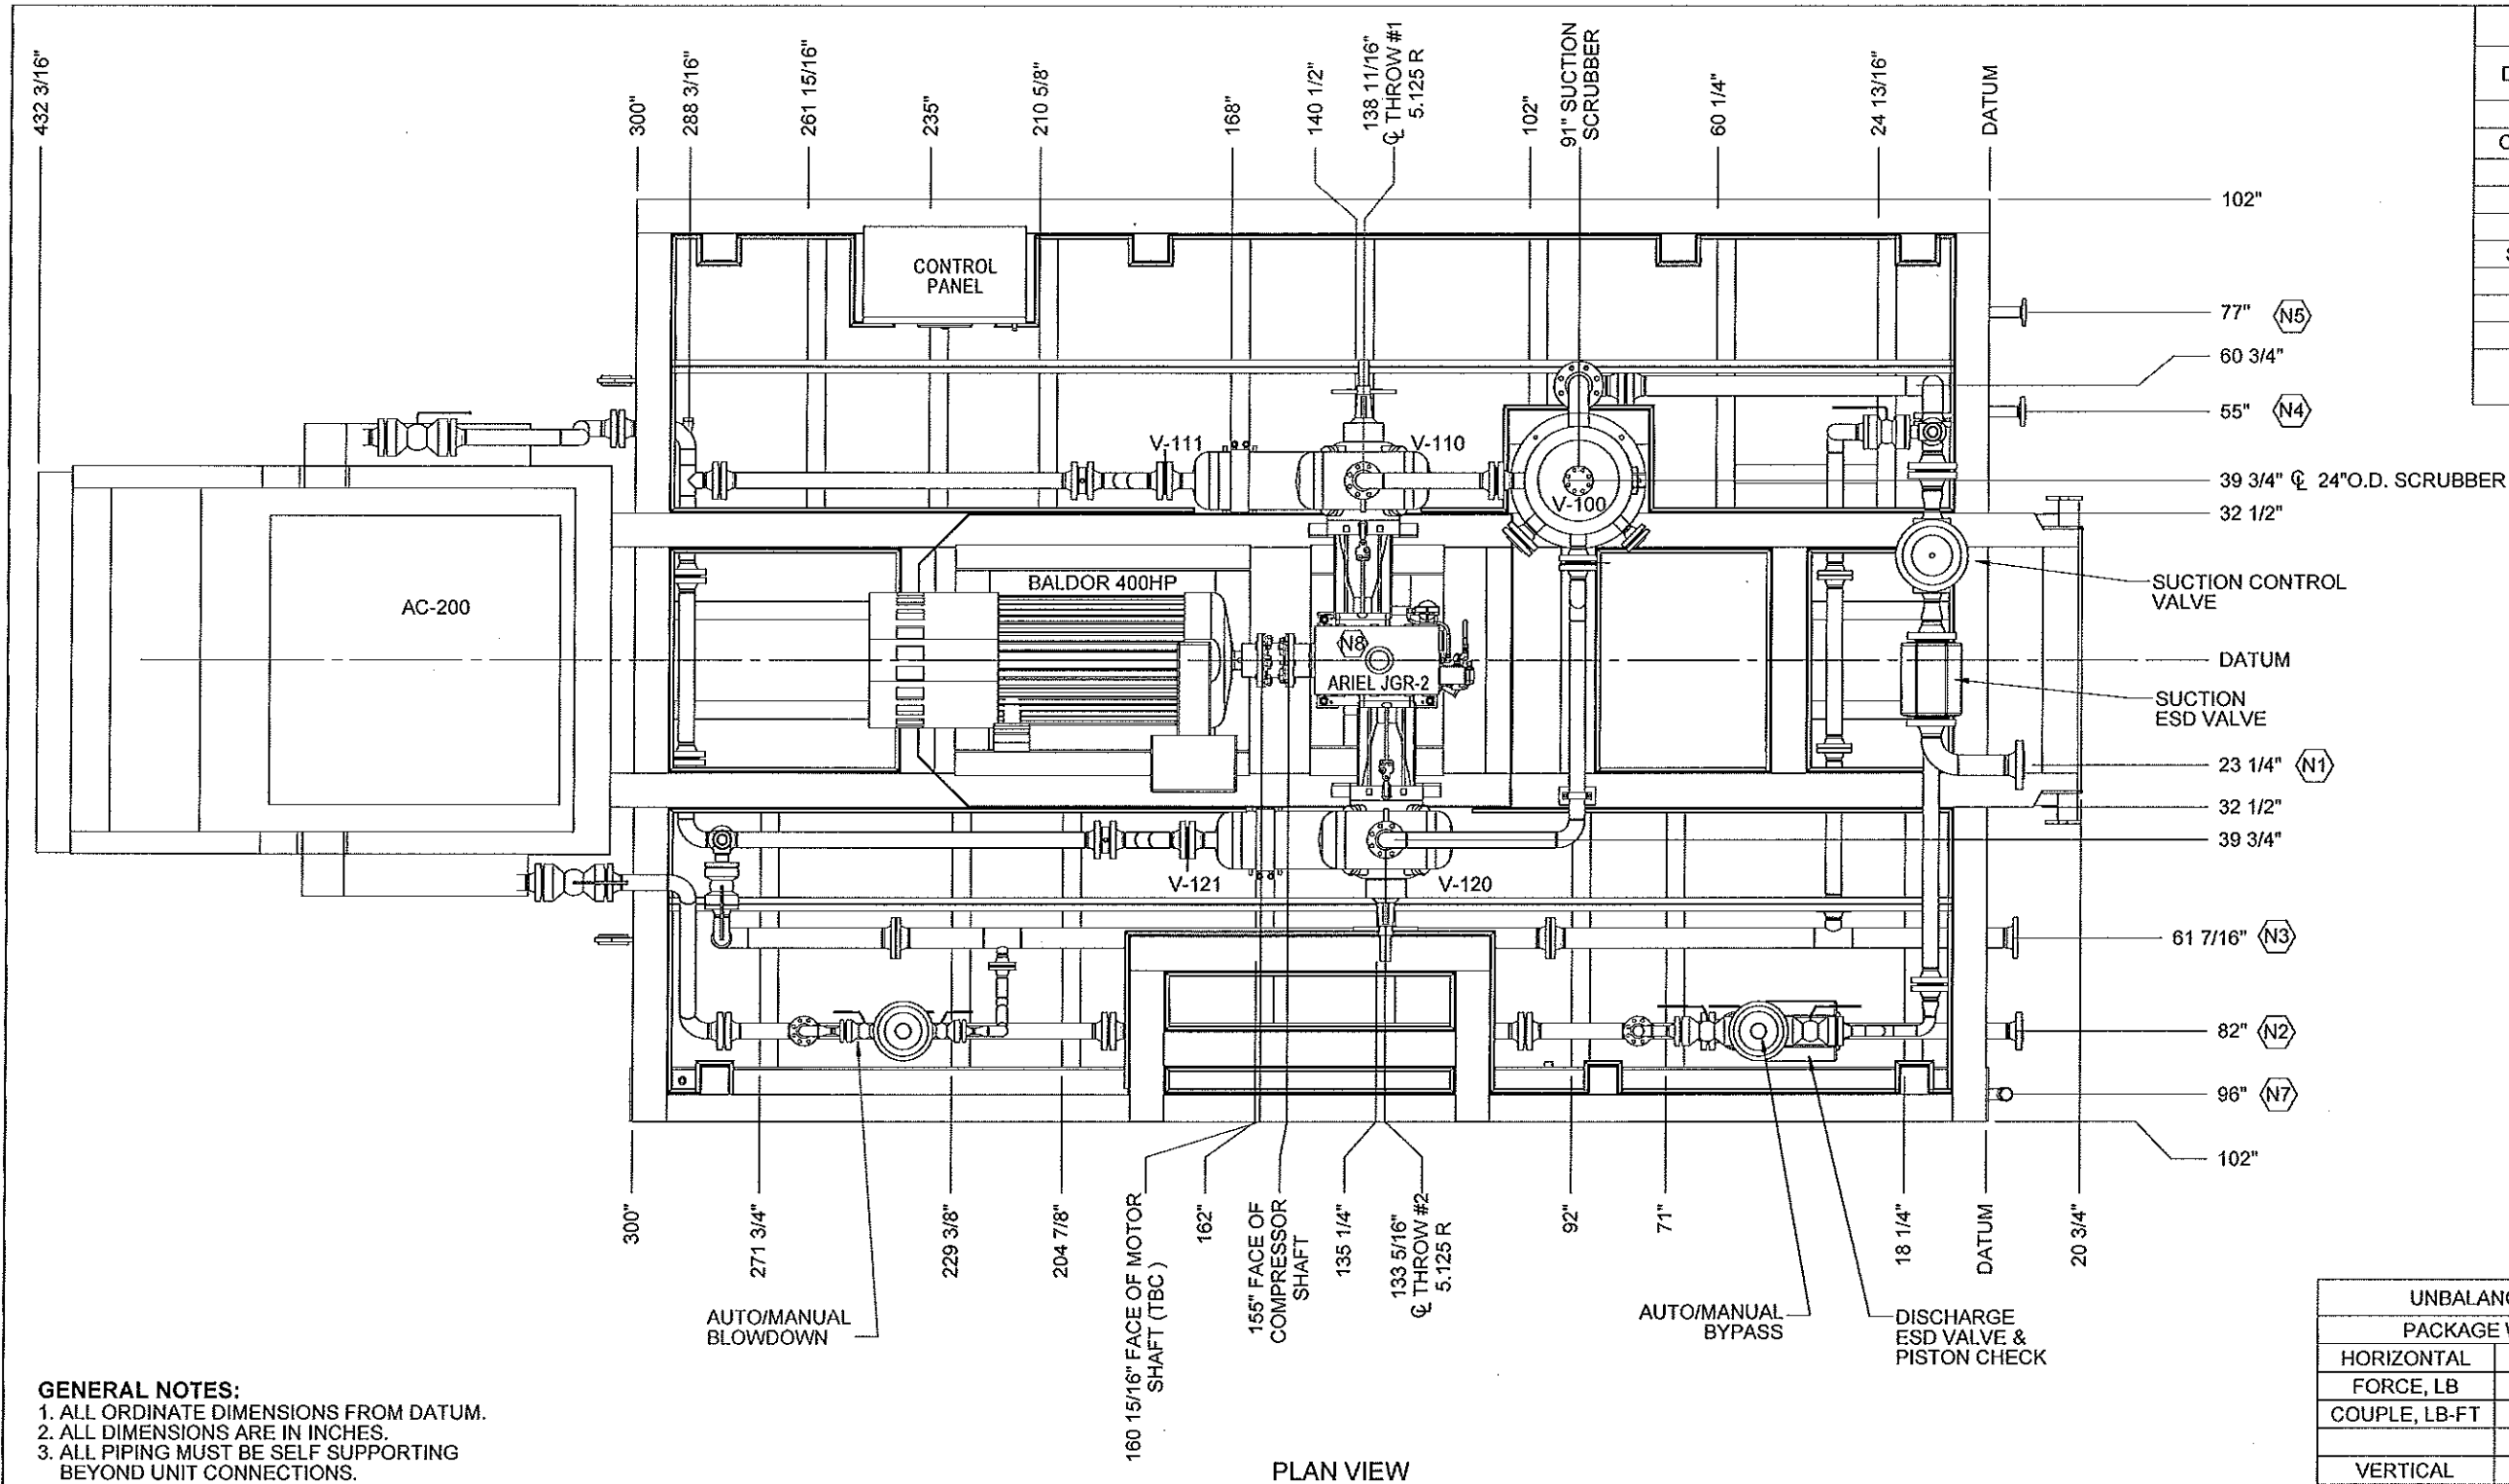

UNIT WEIGHTS	
DESCRIPTION	WEIGHT (LBS)
MOTOR	6500
COMP. w/ cyl's.	3540
COOLER	5300
VESSELS	4000
SPOOLS	2100
SKID w/ conc.	28500
BUILDING	5000
MISC.	5000
ESTIMATED SHIPPING WEIGHT = 65,000 LBS	

CUSTOMER CONNECTIONS				
NO.	DESCRIPTION	SIZE	RATING	CL ELEVATION
N1	INLET	4"	600# RF	41 5/8"
N2	FINAL DISCHARGE	3"	600#RF	9 1/16"
N3	PSV HEADER	4"	150#RF	9 9/16"
N4	SCRUBBER DRAIN	2"	600#RF	8 3/8"
N5	INSTRUMENT AIR SUPPLY	2"	150#RF	8 3/8"
N6	PUMP VENT	1"	PIPE	-
N7	WASTE OIL TANK PUMP OUT	2"	NPT	-
N8	LOCAL COMPRESSOR OIL FILL	2"	PIPE	-

PLAN VIEW

UNBALANCED FORCES & COUPLES		
PACKAGE WEIGHT		- LBS
HORIZONTAL	PRIMARY	SECONDARY
FORCE, LB	87	18
COUPLE, LB-FT	586	755
VERTICAL	PRIMARY	SECONDARY
FORCE, LB	0	-
COUPLE, LB-FT	3054	-

REV	DESCRIPTION	DATE	BY
0	ISSUED FOR APPROVAL	09-24-12	BC
B	ADD 12" TO SKID LENGTH	08-21-12	BC
A	ISSUED FOR APPROVAL	07-30-12	BC

STAMP:

COMPASS COMPRESSION

1637 - 9th Ave. S.E.
 Calgary, Alberta
 Canada T2G 5N4
 P 403-262-2487
 F 403-262-2480

EQUIP: EM400-RAR2-1
 PROJECT: C677
 SHEET: 1 : 7
 DWN BY: BC DATE: 07-26-12
 APP BY: *[Signature]* DATE: 07/24/12

CENOVUS ENERGY
 c/o EQUINOX ENGINEERING
 CHRISTINA LAKE LIFT GAS
 GENERAL ARRANGEMENT
 DWG: C677-601