


SCADAPack 32

Smart Remote Terminal Units

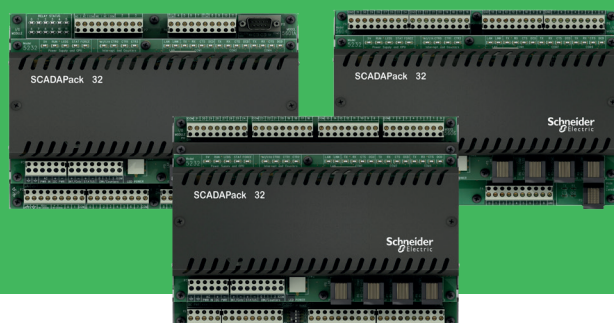

Product at a glance

The SCADAPack 32 is a high performance Smart RTU built to meet the demands of larger applications including support for up to 10 gas flow runs.

This product offers built-in Ethernet, four serial ports, 8 Mb of SDRAM, an integrated power supply, and a wide range of analog and digital I/O options.

Featuring industry-standard Modbus™ and DNP3 serial protocols, and Modbus TCP and UDP-based Ethernet protocols, the SCADAPack 32 can be programmed locally or remotely through a choice of flexible programming languages.

As with all SCADAPack products the SCADAPack 32 is based on a multiprocessor architecture with a coprocessor used for the handling of on-board input/output channels.

Green Premium™ ecolabel
product – Sustainable
performance, by design

SCADAPack 32

Smart Remote Terminal Units

Specifications

P4A, integrated 5604 I/O board

Controller

Processor	Hitachi™ SH-3 32-bit CMOS microcontroller, 120 MHz clock, integrated watchdog timer
Memory	8 Mb SDRAM, 4 Mb FLASH, 1 Mb CMOS RAM
Non-volatile RAM	CMOS RAM with lithium battery retains contents for 2 years with no power

I/O

Analog Inputs	8, user selectable 0...10 Vdc (15-bit) or 0...20 mA (14-bit) 1, 0...32.768 Vdc (10-bit)
Analog Outputs	2 with optional 5305 analog output module, output range 0...20 mA
Digital Inputs	4 on controller board - 3 Digital Input/Counter, 1 Interrupt with optical isolation
Digital Outputs	1, 30 Vdc / 60 mA (used as status output)
Digital I/O 5604 I/O	32 configurable as input or output (1 A DC max output / dry contact input)

Communications

Serial Port COM1	Configurable RS-232 or RS-485, 2-wire half duplex or 4-wire full/half duplex
Serial Port COM2, COM4	- RS-232, DTE, 8 pin modular jack, full or half duplex with RTS/CTS control - Implemented Td, Rd, CTS, RTS, DCD, DTR, +5 V
Serial Port COM3	Located on 5604 I/O module. Same specifications as COM2 and COM4
Baud Rates COM1, COM2 & COM4	300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 57600 and 115200
Baud Rate COM3	1200, 2400, 4800, 9600, 19200, 38400, 57600 and 115200
Serial Protocols	Modbus RTU, Modbus ASCII, DNP3, DF1, PPP
Ethernet Port	RJ45, 10BaseT
Network Protocols	IP: ARP, TCP, TFTP, UDP, ICMP
Ethernet Port Protocols	Modbus TCP, Modbus RTU in UDP, Modbus ASCII in UDP, DNP in TCP, DNP in UDP

SCADAPack 32

Smart Remote Terminal Units

Specifications - continued

P4A, integrated 5604 I/O board

General

I/O Terminations	6, 8, 9 and 10-pole, removable terminal blocks, 12 to 22 AWG, 15 A contacts
Dimensions	213 mm W. x 155 mm H. x 72 mm D. (8.40 in. x 6.13 in. x 2.80 in.)
Packaging	Corrosion-resistant; zinc-plated steel base and stainless steel cover with black enamel paint
Environment	5% RH to 95% RH, non-condensing, -40...70 °C (-40...158 °F)
Power Input	11...30 Vdc, 4.3 W typical (10.8 W full I/O capacity in use)

Certifications

Hazardous Locations	Suitable for use in Class I, Division 2, Groups A, B, C and D Hazardous Locations
North America	Temperature Code T4 per CSA Std C22.2 No. 213-M1987 / UL1604 UL listed and CSA certified to the following standards: • CSA Std. C22.2 No. 213-M1987 - Hazardous Locations • UL Std. No. 1604 - Hazardous (Classified) Locations U
Safety	CSA (cCSAus) certified to the requirements of: CSA C22.2 No. 142-M1987 and UL508. (Process Control Equipment, Industrial Control Equipment) UL (cULUs) listed: UL508 (Industrial Control Equipment)

SCADAPack 32

Smart Remote Terminal Units

Specifications

P4, integrated 5601A I/O board

Controller

Processor	Hitachi SH-3 32-bit CMOS microcontroller, 120 MHz clock, integrated watchdog timer
Memory	8 Mb SDRAM, 4 Mb FLASH, 1 Mb CMOS RAM
Non-volatile RAM	CMOS RAM with lithium battery retains contents for 2 years with no power

I/O

Analog Inputs	8, user selectable 0...5 Vdc (15-bit) or 0...20 mA (14-bit)
Analog Outputs	2 with optional 5303 analog output module, output range 0...20 mA
Digital Inputs	4 on controller board - 3 Digital Input/Counter, 1 Interrupt with optical isolation 16 on 5601A I/O module - 6.5 mA typical at 24 Vdc
Digital Outputs	1 on controller board, 30 Vdc, 60 mA (used as status output) 12 on 5601A I/O module - Sealed mechanical relay: 2 A at 30 Vdc resistive loads 1.0 A at 30 Vdc 220 Vdc maximum operating voltage

Communications

Serial Port COM1	Configurable RS-232 or RS-485, 2 wire half duplex or 4 wire full/half duplex
Serial Ports COM2, COM4	RS-232, DTE, 8 pin modular jack, full or half duplex with RTS/CTS control. Implemented Td, Rd, CTS, RTS, DCD, DTR, +5 Vdc
Serial Port COM3	Located on 5601A I/O module. Same specifications as COM2 and COM4
Baud Rates COM1, COM2 & COM4	300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 57600 and 115200
Baud Rate COM3	1200, 2400, 4800, 9600, 19200, 38400, 57600 and 115200
Serial Protocols	Modbus RTU, Modbus ASCII, DNP3, DF1, PPP
Ethernet Port	10BaseT, RJ45
Network Protocols	IP: ARP, TCP, TFTP, UDP, ICMP
Ethernet Port Protocols	Modbus TCP, Modbus RTU in UDP, Modbus ASCII in UDP, DNP in TCP, DNP in UDP

SCADAPack 32

Smart Remote Terminal Units

Specifications - continued

General

I/O Terminations	6, 8, 9 and 10-pole, removable terminal blocks, 12...22 AWG, 15 A contacts
Dimensions	213 mm W. x 155 mm H. x 72 mm D. (8.40 in. x 6.13 in. x 2.80 in.)
Packaging	Corrosion-resistant; zinc-plated steel base and stainless steel cover with black enamel paint
Environment	5% RH to 95% RH, non-condensing, -40...70 °C (-40...158 °F)
Power Input	11...30 Vdc, 3.5 W typical all relays off, 6.5 W typical all relays on

Certifications

Hazardous Locations	• Suitable for use in Class I, Division 2, Groups A, B, C and D Hazardous Locations • For the latest information regarding product environmental compliance visit the Schneider Electric Check a Product portal at https://checkaproduct.se.com/
North America	Temperature Code T4 per CSA Std C22.2 No. 213-M1987 / UL1604 UL listed and CSA certified to the following standards: • CSA Std. C22.2 No. 213-M1987 - Hazardous Locations • UL Std. No. 1604 - Hazardous (Classified) Locations
Safety	CSA (cCSAus) certified to the requirements of: CSA C22.2 No. 142-M1987 and UL508. (Process Control Equipment, Industrial Control Equipment) UL (cULus) listed: UL508 (Industrial Control Equipment)

SCADAPack 32

Smart Remote Terminal Units

Specifications

P4B, integrated 5606 I/O board

Controller

Processor	Hitachi SH-3 32-bit CMOS microcontroller, 120 MHz clock, integrated watchdog timer
Memory	8 Mb SDRAM, 4 Mb FLASH, 1 Mb CMOS RAM
Non-volatile RAM	CMOS RAM with lithium battery retains contents for 2 years with no power

I/O

Analog Inputs	8, single-ended, software selectable 0...5 Vdc / 0...10 Vdc or 0...20 mA / 4...20 mA (15-bit resolution)
Analog Outputs	2 with optional 5305 analog output module, output range 0...20 mA
Digital Inputs	4 on controller board - 3 Digital Input/Counter, 1 Interrupt with optical isolation 32 on 5606 I/O module • 0.67 mA typical at 24 Vdc on the 12/24 Vdc range • 0.37 mA typical at 48 Vdc on the 48 Vdc range
Digital Outputs	1 on controller board , 30 Vdc, 60 mA (used as status output) 16 relay outputs on 5606 I/O module - dry contact or DC solid state: • Dry contact rating: 3 A, 30 Vdc • DC solid state rating: 3 A, 60 Vdc

Communications

Serial Port COM1	Configurable RS-232 or RS-485, 2 wire half duplex or 4 wire full/half duplex
Serial Ports COM2, COM4	RS-232, DTE, 8 pin modular jack, full or half duplex with RTS/CTS control. Implemented Td, Rd, CTS, RTS, DCD, DTR, +5 Vdc
Baud Rates COM1, COM2 & COM4	300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 57600 and 115200
Serial Protocols	Modbus RTU, Modbus ASCII, DNP3, DF1, PPP
Ethernet Port	10BaseT, RJ45
Network Protocols	IP: ARP, TCP, TFTP, UDP, ICMP
Ethernet Port Protocols	Modbus TCP, Modbus RTU in UDP, Modbus ASCII in UDP, DNP in TCP, DNP in UDP

SCADAPack 32

Smart Remote Terminal Units

Specifications - continued

P4B, integrated 5606 I/O board

General

I/O Terminations	5, 6, 8, 9 and 10-pole, removable terminal blocks, 12 to 22 AWG, 15 A contacts
Dimensions	213 mm W. x 164 mm H. x 72 mm D. (8.40 in. x 6.48 in. x 2.80 in.)
Packaging	Corrosion-resistant; zinc-plated steel base and stainless steel cover with black enamel paint
Environment	5% RH to 95% RH, non-condensing, -40...70 °C (-40...158 °F)
Power Input	11...30 Vdc, 4.3 W typical (10.8 W full I/O capacity in use)

Certifications

Hazardous Locations	Suitable for use in Class I, Division 2, Groups A, B, C and D Hazardous Locations
North America	Temperature Code T4 per CSA Std C22.2 No. 213-M1987 / UL 1604 UL listed and CSA certified to the following standards: • CSA Std. C22.2 No. 213-M1987 - Hazardous Locations • UL Std. No. 1604 - Hazardous (Classified) Locations
Hazardous Locations Europe	Model "5606 SSR, 24DI version only" ATEX II 3G, Ex nA IIC T4 per EN 60079-15, protection type n (Zone 2)
Hazardous Locations	Model "5606 SSR version only" IECEx, Ex nA IIC T4 per IEC 60079-15, protection type n (Zone 2)
Safety	CSA (cCSA _{US}) certified to the requirements of: CSA C22.2 No. 142-M1987 and UL508. (Process Control Equipment, Industrial Control Equipment) UL (cUL _{US}) listed: UL508 (Industrial Control Equipment)

SCADAPack 32

Smart Remote Terminal Units

Model Code

SCADAPack 32: P4A, P4 and P4B

Model Code	Select: Controller
TBUP4	SCADAPack 32, 32-Bit controller with Integrated Ethernet Port

Code	Select: Lower I/O Module
	5601A lower I/O module, includes 16 Digital Inputs, 12 Digital Outputs and 8 Analog Inputs (see options below)
A	5604 lower I/O module, includes 32 configurable Digital I/O and 8 selectable Analog Inputs (0...10 Vdc or 0...20 mA)
B	5606 lower I/O module, includes 32 D/I, 16 Dry Contact D/O and 8 software configurable A/I
C	5606-A lower I/O module, includes 32 D/I, 16 Solid State Relay D/O and 8 software configurable A/I
N	No lower I/O module (provides controller module only)

Code	Select: Communication Serial Ports
1	TBUP4/P4A/P4N: 3 RS232, 1 RS232/485, 1 Ethernet TBUP4B/P4C: 2 RS232, 1 RS232/485, 1 Ethernet

SCADAPack 32

Smart Remote Terminal Units

Model Code - continued

SCADAPack 32: P4A, P4 and P4B

Code	Select: Gas Flow Run-time Option
0	None
Flow Computer Runs	
G	2 Run Gas Flow
F	4 Run Gas Flow
T	10 Run Gas Flow
Flow Computer Runs - Gas Transmission Version	
V	2 Run Gas Flow
W	4 Run Gas Flow

Code	Select: Protocol Option/Programming Environment
2	Modbus and DNP 3.0 (Level 2) protocol with Telepace™ Ladder Logic and C Language firmware loaded - IEC enabled
5	Modbus and DNP 3.0 (Level 2) protocol with IEC 61131-3 and C Language firmware loaded - Telepace enabled

Code	Select: Analog Inputs
01	0...20 mA, single ended (On TBUP4 & TBUP4A, Default on TBUP4B which is software configurable to 0...5 Vdc or 0...10 Vdc)
02	0...5 Vdc, single ended (TBUP4 Only)
03	0...10 Vdc, single ended (TBUP4A Only)

Code	Select: Digital Inputs/Outputs
0	Dry Contact Digital Inputs, Open Drain Digital Outputs, Individually configurable (TBUP4A Only)
0	24 Vdc D/I TBUP4 & TBUP4B: Dry Contact D/O TBUP4C: Solid State Relay D/O (Not for TBUP4A or TBUP4N)

Code	Select: Analog Outputs
0	None (required for TBUP4N)
1	2 channel Analog Output option, 0...20 mA

SCADAPack 32

Smart Remote Terminal Units

Disclaimer: Schneider Electric reserves the right to change product specifications. For more information visit www.se.com.

Schneider Electric

35 rue Joseph Monier
92500 Rueil-Malmaison, France
Email: RemoteOperations@se.com

www.se.com

Life Is On



Document Number TBULM08002-85 v19

© 2017 Schneider Electric. All Rights Reserved. Schneider Electric, Life is On Schneider Electric, Green Premium, Modbus, Realflo, SCADAPack and Telepace are trademarks and the property of Schneider Electric SE, its subsidiaries and affiliated companies. All other trademarks are the property of their respective owners. February 2022



Green Premium™

Schneider Electric's commitment to deliver products with best-in-class environmental performance.



More than 75% of our product sales offer superior transparency on the material content, regulatory information and environmental impact of our products:

- RoHS compliance
- REACH substance information
- Industry leading # of PEP's*
- Circularity instructions

Green Premium promises compliance with the latest regulations, transparency on environmental impacts as well as circular and low-CO₂ products.

CO₂ and P&L impact through... Resource Performance

Green Premium brings improved resource efficiency throughout an asset's lifecycle. This includes efficient use of energy and natural resources, along with the minimization of CO₂ emissions.

Cost of ownership optimization through... Circular Performance

We're helping our customers optimize the total cost of ownership of their assets. To do this, we provide IoT-enabled solutions, as well as upgrade, repair, retrofit, and remanufacture services.

Peace of mind through... Well-being Performance

Green Premium products are RoHS and REACH-compliant. We're going beyond regulatory compliance with step-by-step substitution of certain materials and substances from our products.

Improved sales through... Differentiation

Green Premium delivers strong value propositions through third-party labels and services. By collaborating with third-party organizations we can support our customers in meeting their sustainability goals such as green building certifications.



Learn more
about
Green
Premium

*PEP: Product Environmental Profile (i.e. Environmental Product Declaration)