

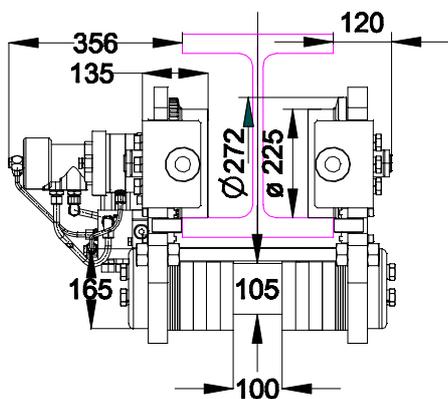
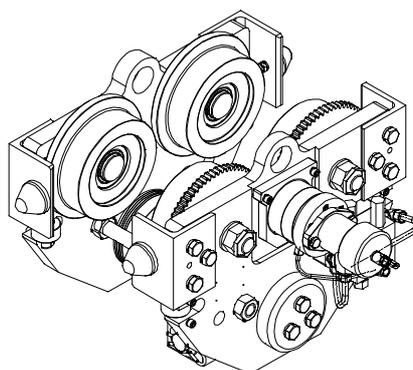


TR2U250-0E HYDRAULIC EA SPECIAL

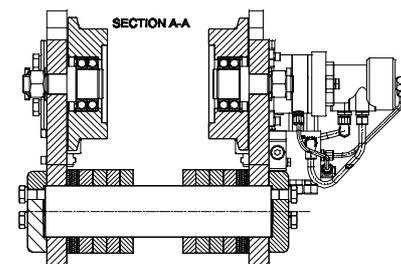

Can be adjust
on demand

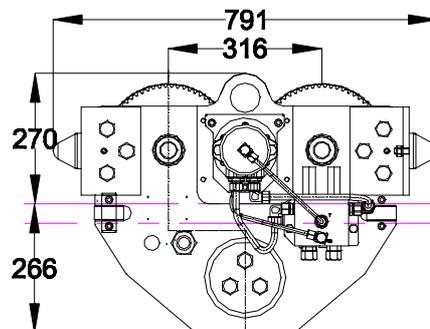

Standard Features :

- All steel/cast iron construction
- Rugged and Compact modular design
- Design factor 5:1
- Design temperature -20°C
- Explosion proof - No downtime
- Automatic fail safe disc brake (no adjustment required) on hoist and trolley motor
- Orbit type hydraulic motor
- Individually load tested before shipment
- Easy maintenance

Options:

- Hydraulic Joystick control – Emergency stop (for CE compliance)
- Rack and pinion drive
- Clevis/hook mount version
- Marine or offshore paint including sandblasting
- Spark resistant package for ATEX zone 1

Ex classifications (ATEX)

- Standard version is suitable for Zone 2 (ATEX Marking Ex II 3 GD c IIB 135°C x)
- Optional spark resistant package is suitable for Zone 1 (ATEX marking Ex II 2 GDc IIB135°Cx)

FEM classification

- Driving mechanism classification 1Bm

Technical data :

Model	TR2U250-OE...
Rated Capacity (metric ton)	25
Recommended network pressure (bar)	175
Travelling Speed (m/min)	12
Trolley maximum oil flow (l/min)	10
Min. - Max. Trolley flange adjustment (mm)	160-310
Maximum Trolley flange thickness (mm)	40
Minimum curve radius (m)	3