


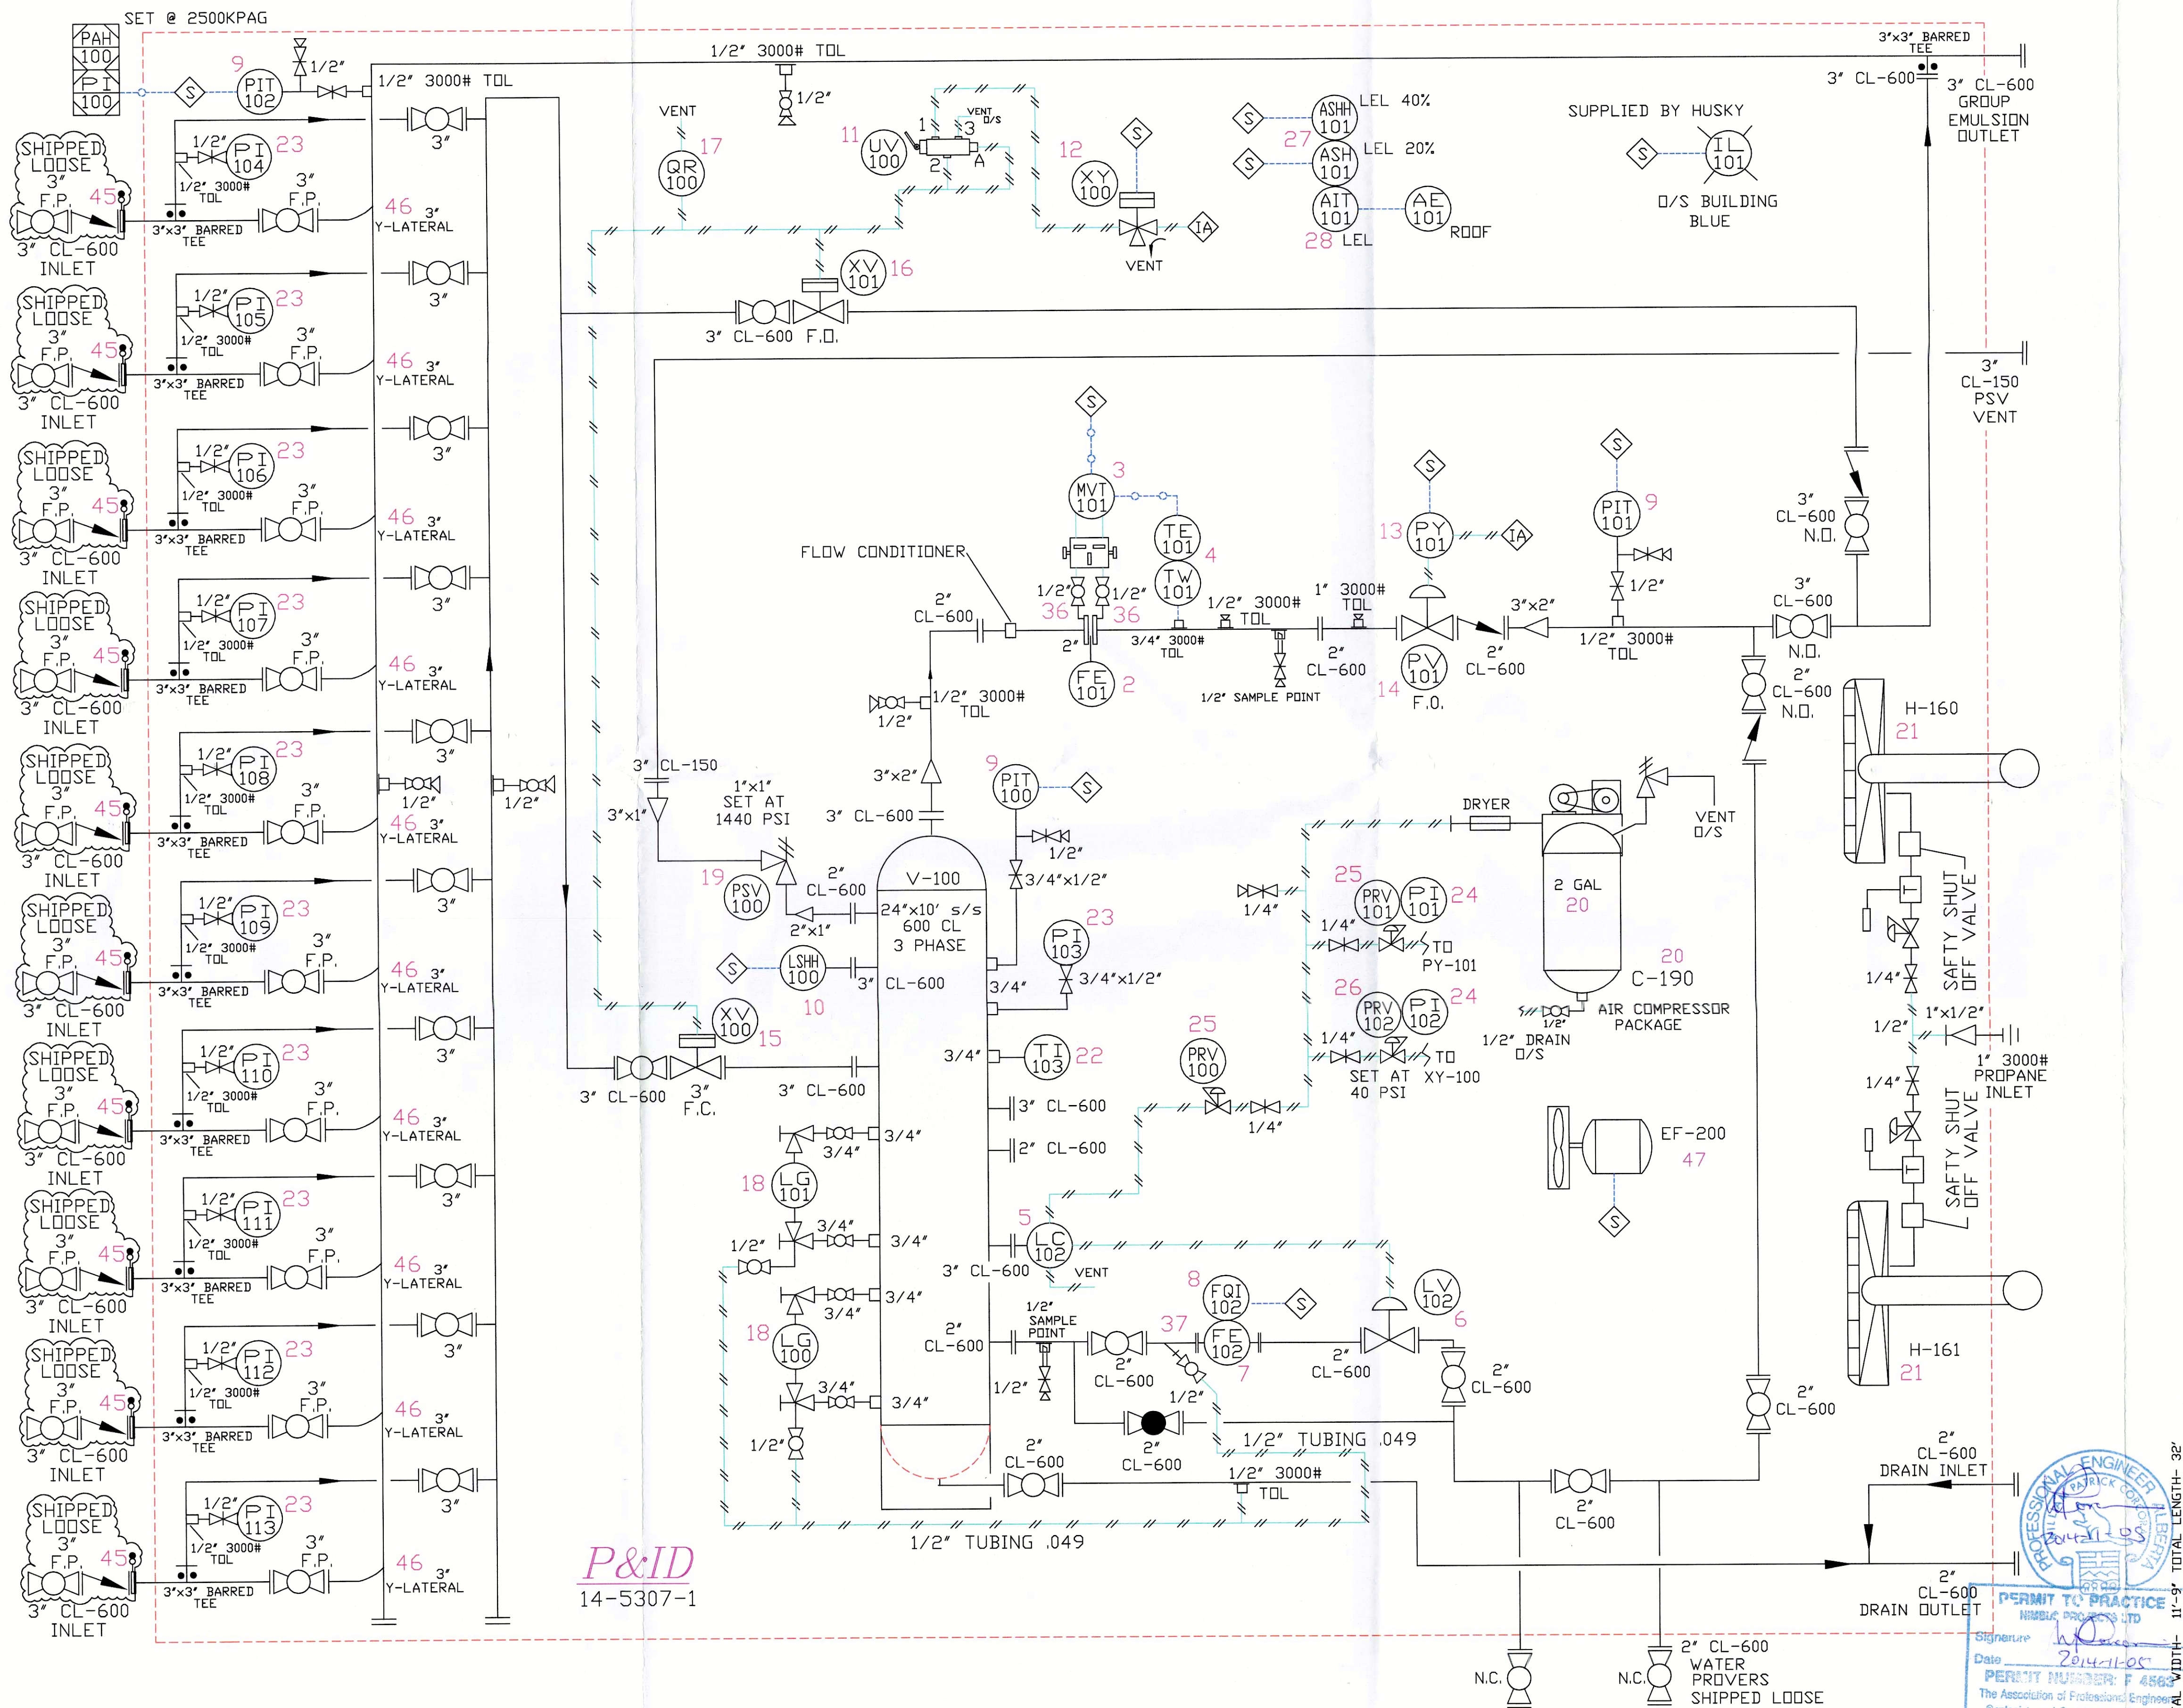

P&ID
14-5307-1

EQUIPMENT

TAG #	ITEM	QTY	DESCRIPTION
V-100	1	1	RJV 24"x10' S/S 600# 1440 PSI 3-PHASE, VERTICAL MISTEX SEPARATOR, 1/8" CA, 10% RADIOGRAPHY, INSPECTED BY ABSA
FE-101	2	1	NUFLO 2" 600 ANSI 1440 PSI SCH 80, AGA 2000 VERSION, BETA .70, FLOW CONDITIONER CPA, 1-3/4", 2-1/2" 3000# TOL, SENIOR, (54" O/A).
MVT-101	3	1	ROSEMOUNT 3095FB MODEL 3095FB3AB4C6 MULTIVARIABLE TRANSMITTER, DIFFERENTIAL PRESSURE RANGE 0-10 TO 0-1000 IN H2O, (0-25 mbar to 0-2.5 mbar) c/w PANAM 5-VALVE CARBON STEEL MANIFOLD.
TE-101	4	1	AIRCOM 3-WIRE, 100 OHMS ASSEMBLY, 0-450 C RANGE, c/w 2-1/2" SST THERMOWELL
LC-102	5	1	FISHER 2" NPT SERIES L2 LIQUID LEVEL CONTROL, STANDARD, CS BODY, SNAP ACTING, c/w 1-7/8" x 12" PVC DISPLACER.
LV-102	6	1	FISHER 2" 600# SERIES D3 CONTROL VALVE, STD. 17-4 PH SST HARDENED TRIM, 1" PORT SIZE, 0-35 PSIG SIGNAL (ATD) TRIED CLOSED
FE-102	7	1	NUFLO 2" 600# WAFER STYLE TURBINE, 2" BORE x 2" TURBINE METER, 316 SST METER BODY, STD. SERVICE, MAGNETIC PICK-UP, 4-400 GPM.
FQI-102	8	1	NUFLO MODEL MC-111 PLUS FLOW TOTALIZER c/w 3.6 BATTERY, LOCAL DISPLAY PROGRAMMING VIA KEY PAD, PRE-AMP OUTPUT 4-20 mA.
PIT-100/101	9	3	ROSEMOUNT SCALABLE PRESSURE TRANSMITTER, MODEL 3051S2TG4A, 1/2" TO 300 PSIG, -0.98 TO 20.7 bar RANGE, 1/2" FNPT.
LSHH-100	10	1	SDR 2" NPT MODEL 15101 PNEUMATIC LEVEL SWITCH, CARBON STEEL BODY, 316 SST FLAT, STD. SERVICE.
UV-100	11	1	AMOT 1/4" NPT MOD# 4057 3-WAY SWITCHING VALVE, STANDARD SERVICE, MANUAL RESET.
XY-101	12	1	ASCO 1/4" NPT SOLENOID VALVE, MODEL EF8314G301, 24 VDC, 3-WAY STAINLESS BODY, EXPLOSION PROOF, 60 PSI MAX. PRESSURE.
PY-101	13	1	FISHER TYPE 12P 1/2" TRANSDUCER, 4-20 mA INPUT SIGNAL, 35 PSIG, SUPPLY SIGNAL, 6-30 PSI OUTPUT SIGNAL, NATURAL GAS SERVICE.
PV-101	14	1	FISHER 2" 600# RFF 657-D-40 PRESSURE CONTROL VALVE, 1" TRIM, D-BODY, S17-4H/1150/NIT 50, TRIM, STD. SERVICE, SIZE 40, ACTUATOR, FAIL CLOSED, AIR TO OPEN, MAX. SHUT IN PRESS. 1440 PSIG
XV-100	15	1	CVS C-160SR07 ACTUATORS c/w 3" 600# RP-RFF, STD. JAG BALL VALVES, FAIL CLOSED, SUPPLY 40 PSI.
XV-101	16	1	CVS C-160SR07 ACTUATORS c/w 3" 600# RP-RFF, STD. JAG BALL VALVES, FAIL OPEN, SUPPLY 40 PSI.
QR-100	17	1	REXROTH QUICK EXHAUST VALVE, 1/4" NPT., DIAPHRAGM OPERATED.
LG-100/101	18	2	PENBURTHY MODEL 1TMS TRANSPARENT GAUGE GLASS, STANDARD c/w 330J GAUGE COCKS & 1/2" DRAIN BALL VALVE.
PSV-100	19	1	TAYLOR SET # 1440 PSIG, TYPE E-DRIFFICE, 0.212 SG IN/5181 SCFM.
C-190	20	1	SAYLOR-BEALL PNEUMATIC COMPRESSOR MOD. 5-HP, 240 VOLT, 3-PHASE TECO EXP. PROOF MOTOR, 80 US GALLON VERTICAL AIR RECEIVER, 60Hz/1800 rpm, DESIGN PRESS. 200 PSI, CAPACITY DRYER 13 SCFM, SAYLOR-BEALL 705 DUAL CYLINDER TWO STAGE AIR COMP. PUMP, c/w CACTUS COALESCING MEMBRANE DRYER & PREFILTER ASSEMBLY.
H-160/161	21	2	CATADYNE BX24X24 24,000 BTU, 120V-AC, PROPANE HEATER c/w STANDS, SS/DV, REGULATORS, 25 FT CABLES, THERMOSTAT, GRILL, VENT HOOD & ELECTRICAL AS PER CEC REGULATIONS.
TI-100	22	1	TREND MODEL 33 3/4" STEEL, 4" STEM, -40/120F DUAL c/w 3/4" x 4" 304 SST THERMOWELL ON VESSEL
PI-103-113	23	13	WIKA #233.54, 4" DIAL, 0-1500 PSI, 1/2" BOTTOM CONN., LIQUID FILLED, DS, c/w PANAM 1/2" 316 SST ISOLATION/BLEED VALVES
PI-101/102	24	2	WIKA 2 1/2" DIAL 1/4" NPT BOTTOM CONN. #233.53 LIQUID FILLED, DS, 0/60 PSI, 0-200 PSIG ON DRY 102
PRV-100/101	25	2	FISHER 1/4" NPT TYPE 67CFR-362/SPEC STANDARD SERVICE, 5-35 PSI, SPRING RANGE SET @ 30 PSIG, TAPPED BONNET.
PRV-102	26	1	FISHER 1/4" NPT TYPE 67CFR-601/SPEC STANDARD SERVICE, 0-125 PSI, SPRING RANGE SET @ 40 PSIG, TAPPED BONNET.
ASHH-101	27	1	MILLENNIUM COMBUSTIBLE GAS DETECTOR, MODEL #MLP-A-SC1100-SEP
AIT-101	28	1	BLUE STROBE LIGHT, 120V, 100 WATT, 1" DIA, 1" STEM, 1" CONN.
	29	2	KILLARK 150W/120V MH FIXTURE, MODEL EZP156X2GSU103
	30	1	KILLARK 70W/120V MH FIXTURE, MODEL VM3076B2GLNRS
	31	10	PBV 1/2" NPT 2000 PSI STANDARD SERVICE, 316 TRIM, BALL VALVE
	32	4	PBV 3/4" NPT 2000 PSI STANDARD SERVICE, 316 TRIM, BALL VALVE
	33	1	PBV 1" NPT 2000 PSI STANDARD SERVICE, 316 TRIM, BALL VALVE
	34	3	PANAM 1/4" NPT 6000 PSI CARBON STEEL NEEDLE VALVES
	35	3	PANAM 1/2" NPT 6000 PSI CS MULTIPORT c/w BLEED NEEDLE VALVES
	36	2	SWAGelok 1/2" NPT 2000 PSI FULL PORT BALL VALVE ON METER RUN.
	37	1	ALBERTA STRAINER 2" 600# RFF 1480 WP, FIGHYS800
	38	1	PBV 2" 600# ANSI R/F, GLOBE VALVE, STANDARD TRIM.
	39	1	PBV 2" 600# ANSI R/F, REG. PORT FIGH3-F20R06-S STD. SERVICE
	40	14	PBV 3" 600# ANSI R/F, REG. PORT FIGH3-T3-R30R06-S STD. SERVICE
	41	20	PBV 3" 600# ANSI R/F, FULL PORT FIGH3-T3-R30R06-S STD. SERVICE
	42	2	DSI 3" 600# VLV FIGH35-50ST-14-F, SWING STYLE CHECK VALVE
	43	11	DSI 3" 600# R/F FIGH35-50ST-14-F, SWING STYLE CHECK VALVE
	44	2	WELKER GAS SAMPLE QUILL SP-6, c/w 1/2" ISOLATION NEEDLE VALVE
	45	10	3" 600# ANSI PADDLE TYPE SPEC. BLIND
	46	1	3"x3"x3" SCH. 40 Y-LATERAL RATED FOR 9930 KPA.
EF-200	47	1	CAN-AM EXPLOSION PROOF 12"x12" EXHAUST FAN, 120 VOLT, SINGLE PHASE, WIRED BY OTHERS, 1/2 HP.

RJV GAS FIELD SERVICES 4901 BRUCE RD VEGREVILLE, ALTA T9C-1C3 PHONE (780) 632-7774 FAX (780) 632-6820		TITLE: HUSKY OIL OPERATIONS LIMITED 24" x 10' S/S 3-PHASE, 600# ANSI, STD. SERVICE, 10 WELL HEADER, SATELLITE/TEST SEPARATOR FACILITIES.	
		DWG. #	5307-1
WARNING! This drawing and the design it covers are confidential and shall not be disclosed to others or reproduced in any manner, or used for any purpose whatsoever, except with written consent of R J V Gas Field Services Ltd.		REV	14-5307
		Dwn By:	SI
		Date:	AUG, 15/14
		Scale:	N.T.S.