

ELEVATION VIEW

NOTES:


- 1) PRIMARY TANK (MAX: 16 OZ. PRESS; 0.5 OZ. VAC)
- 2) INTERNAL COATING WITH DEVCOE DEVCHEM 253

SPECIFICATIONS

- PIPING: A-106-B (SCH.80; SMLS)
- FITTINGS: A-105/A-234-WPB
- FLANGES: A-105 (RF)
- VALVES: 2000lb (NACE TRIM)
- GASKETS: FLEXITALIC
- STUDS/NUTS: A-193-B7M/A-194-2HM
- STEEL TANK: A-36
- FAB. CODE: API 12F (STEEL TANK; DOUBLE WELD)

NOZZLE SCHEDULE			
MARK	SIZE	RATING	SERVICE
N1	2"	THR'D	INLET C/W MANIFOLD
N2	3"	THR'D	OUTLET C/W MANIFOLD
N3	4"	150# RF	SPARE (FUTURE L.T.)
N4	1.5"	THR'D	LEVEL GAUGE CONNECTION
N5	2"	THR'D	SECONDARY DRAIN c/w VALVE
N6	1"	THR'D	OVERFLOW ASSEMBLY
N8	1.5"	THR'D	SIGHT WINDOW
V1	10"	150# RF	VENT C/W HOOD & BIRDSCREEN
V2	8"	1/4" PL.	AUXILIARY VENT c/w LID
V3	2"	THR'D	ANNULUS VENT c/w CAP
M1	24"	FLG'D	MANWAY

NOMINAL (USEABLE)	200BBL (32,910L)
PRIMARY TANK	13'Ø x 9'h
SECONDARY TANK	14'Ø x 9'h
OVERALL SIZE	14' x 16' x 11'h
ASSEMBLY WEIGHT	12,600lb (5,730kg)

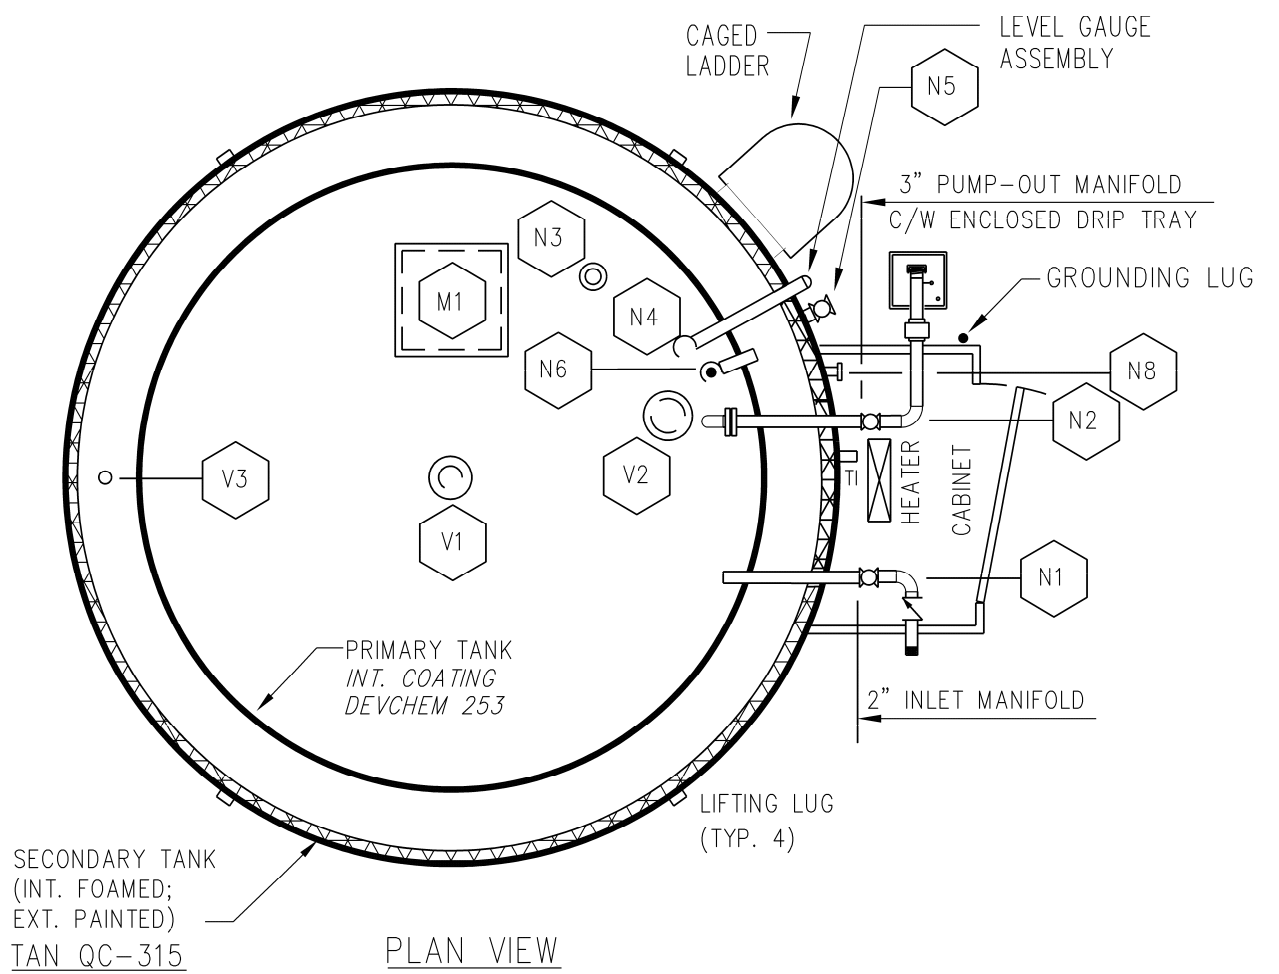

PLAN VIEW

TAG T-800

TANK SERIAL # / AREA / LSD

200A04T147 / TOLMAN / 13-29-33-21W4

A	NOV 5,04	JJ	AS ORDERED
Rev	Date	Dwn	Description
HUSKY OIL OPERATIONS LTD.			
DUAL-CONTAINMENT STORAGE TANK(S) c/w 'UTILITY' HEATING PACKAGE			
Scale	NONE	Dwg. No.	HSK-204
TankSafe Inc.			
CALGARY, ALBERTA, CANADA			

DRAFTED BY HARDCASTLE DESIGN LTD.



© COPYRIGHT. ALL RIGHTS RESERVED.