


- NOTES:**
 1) PRIMARY STORAGE TANK
 (MAX. 16 OZ. PRESS; 0.5 OZ. VAC)

SPECIFICATIONS

- PIPING: A-106-B (SCH.80; SMLS)
 FITTINGS: A-105/A-234-WPB
 FLANGES: A-105 (RF)
 VALVES: 2000lb (NACE TRIM)
 GASKETS: FLEXITALIC
 STUDS/NUTS: A-193-B7M/A-194-2HM
 STEEL TANK: A-36
 FAB. CODE: API 12F (STEEL TANK; DOUBLE WELD)

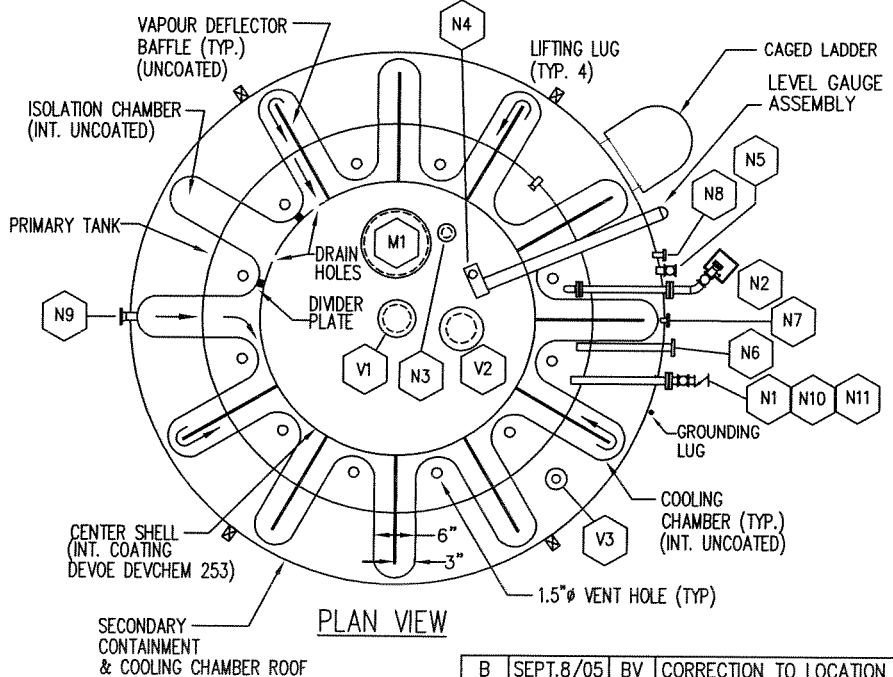

MARK	SIZE	SPEC.	DESCRIPTION	QTY.
M1	20"	1/4" PL	MANWAY (FLANGED)	1
V3	2"	THR'D	ANNULUS VENT c/w VENT CAP	1
V2	8"	1/4" PL	AUX.ILLIARY VENT CONN. & LID	1
V1	4"	150# RF	PRIMARY VENT CONN.	1
N11	2"	150#RF	SPARE CONNECTION	1
N10	2"	150#RF	PRIMARY TANK TEMP. SENSOR	1
N9	3"	150# RF	VAPOUR INLET	1
N8	1.5"	THR'D	SIGHT WINDOW	1
N7	1/2"	THR'D	TEMP. CONN./GAUGE	1
N6	3"	150#RF	IMMERSION HEATER CONN.	1
N5	2"	THR'D	ANNULUS DRAIN CONN./VALVE	1
N4	1.5"	THR'D	LEVEL GAUGE CONN.	1
N3	2"	THR'D	SPARE ROOF CONN. (CAPPED)	1
N2	2"	150# RF	LOADLINE/CAMLOCK/DRIPTRAY	1
N1	2"	150# RF	LIQUID INLET	1

B	SEPT.8/05	BV	CORRECTION TO LOCATION
A	AUG 26/05	JF	ISSUED FOR APPROVAL
REV	DATE	BY	DESCRIPTION

FORT ENERGY CORP. c/o BDR Eng.

CORBETT GAS PLANT

BDR JOB# 43884
 SN#50A05D018/LSD:15-10-82-06 W5M

N.T.S. Scale
 FEC-304 Dwg. No.

TANKSAFE INC.
 CALGARY, ALBERTA, CANADA

NOMINAL (USEABLE)	50BBL (8,170 L)
PRIMARY TANK	8'φ x 6'h
SECONDARY TANK	9'φ x 6'h
CONDENSING UNIT	9'φ x 4'h
OVERALL SIZE	9' x 13' x 13'h
ASSEMBLY WEIGHT	9,500lb (4,320kg)

ALL RIGHTS RESERVED

