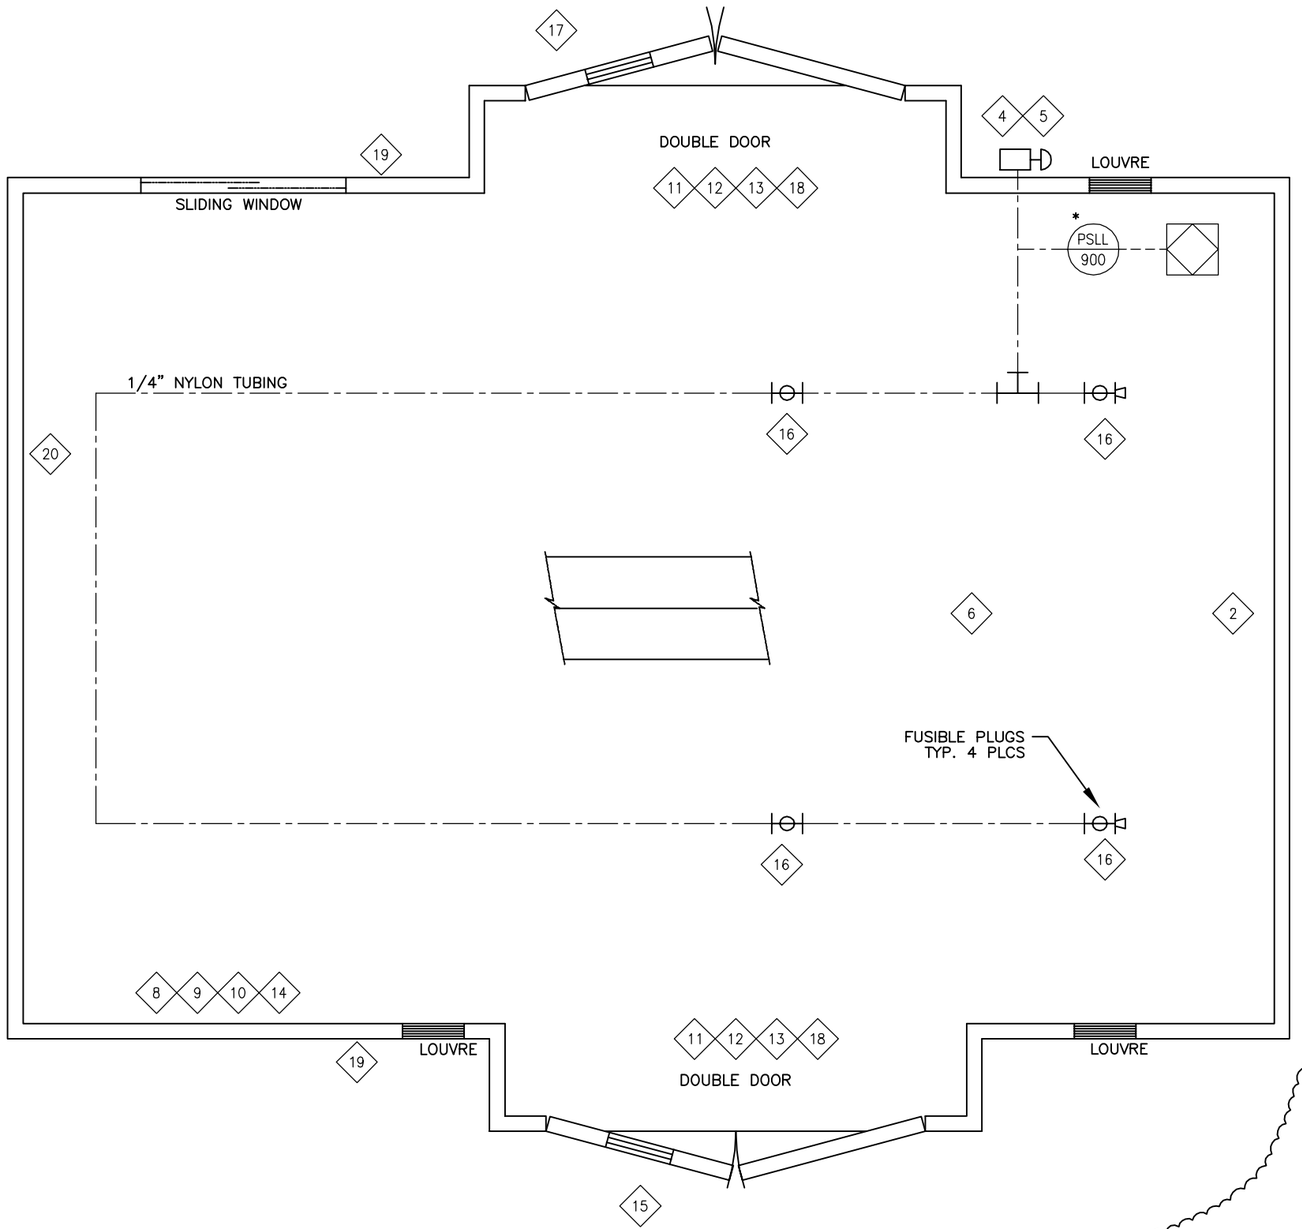

BUILDING EQUIPMENT AND DETAILS

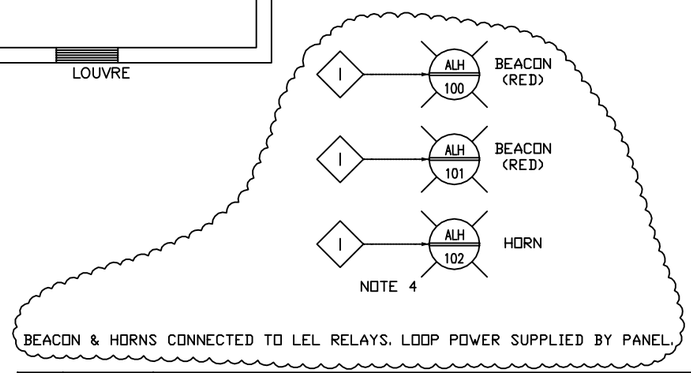

COLOR SCHEDULE

WALL INTERIOR LINER:	24 GA FLUTED ALUM. NATURAL INTERIOR
WALL EXTERIOR LINER:	22 GA GALVANIZED STEEL
COOLER:	EM SILVER GREY
EQUIPMENT:	EM SILVER GREY
SKID PERIMETER:	EM SILVER GREY
GRATING:	BLACK
SCRUBBER DRAINS:	EM SILVER GREY

© 2017 Enerflex Ltd.
REPRODUCTION OF ANY PORTION OF THESE MATERIALS WITHOUT THE EXPRESS WRITTEN CONSENT OF ENERFLEX LTD. IS STRICTLY PROHIBITED. THESE MATERIALS SHALL NOT BE USED FOR ANY PURPOSE OTHER THAN THE REPAIR AND MAINTENANCE OF THE PRODUCTS TO WHICH THEY RELATE.

	OPTION NUMBER	OPTION DESCRIPTION
☐	7002A	EXTRA EXTERIOR ESD BUTTON
☐	7003A	BUILDING LIGHTS 12 VDC
☑	7006B	FIRE DETECTOR
☐	7008	ICE RAKES
☐	7009	PERFORATED WHITE LINER
☐		
☐		
☐		

BILL OF MATERIAL

ITEM	QTY	EFX CODE	DESCRIPTION
2	1	107591	BLDG, B530, 22G GALV EXTERIOR, 24G FLUTED ALUMINUM INTERIOR, R12 BATT INSULATION
4	1	104809	VALVE, 3-WAY, TYPE CA, 1/4" NPTF C/W RED KNOB [AMOT, 4057D019F1-RFE]
5	1	104792	BRACKET, MOUNT, FOR 3-WAY 4057 VALVE [AMOT, 5186]
6	2	110228	DECALS (SPECIFY DETAIL)
8	1	104309	ACCESSORY, CALIBRATION CUP, SPLASH GUARD & RAINSHIELD [NET SAFETY, CCS-1]
9	1	104312	CALIBRATION, OF SENSORS GAS LEL & FIRE C/W CALIBRATON CERTIFICATE [NET SAFETY]
10	1	118138	DETECTOR, COMBUSTIBLE GAS DETECTION, MILLENNIUM [NET SAFETY, MLP-A-SC1100-SEP]
11	1	104636	BLDG, EXTENSION, PULL-OUT DOOR, SET OF 2
12	32	107443	PLATE, CHECKER, 3/16"
13	2	109148D	SUPPORT, BAY DOOR, B400/401/530/570
14	1	103105	WIRE, OF MICROWATT XP LEL GAS SENSOR, B & C-SERIES
16	4	102752	FTG, TUBE, 3/8"T FUSIBLE PLUG, 255 DEG.F, 316SS [SWAGELOK, SS-6-FTA-255]
17	2	120916	SIGN, UNIT, 12" X 12" WHITE .040 ALUMINUM, PAMCO PHONE NUMBERS
18	2	119971	SUPPORT, BAY DOOR, EXTENSION CHECKER PLATE, B-SERIES
19	2	NEW	BEACON, FEDERAL SIGNAL, 225XL-024R
20	1	NEW	HORN, FEDERAL SIGNAL, 450EWBX-024

OPTIONS

ITEM	QTY	EFX CODE	DESCRIPTION

NOTE:
ALL DOORS c/w ALUMINUM THRESHOLD, VINYL WEATHER STRIPPING, HEAVY DUTY HINGES, HEAVY DUTY FRAME, CYLINDER LOCK, HEAVY DUTY WEEPS & PAINT. ALL DOUBLE DOORS c/w HEAD & FOOT BOLTS ON INACTIVE LEAF.
* INCLUDED IN CONTROL PANEL

REV	DESCRIPTION	DATE	DRAWN BY	CHECKED BY
3	UNIT RENTED TO YOHO	18/01/12	DD	BH
2	UNIT RENTED TO ROSKA	17/06/20	TS	BH
1	SOLD UNIT	06/04/24	LHC	SS
0	FOR CONSTRUCTION	05/10/21	LHC	SS

ENERFLEX

TITLE:
BUILDING EQUIPMENT
B530X (OP70)

FOR: ENERFLEX RENTALS

CONSULTANT:
P.O.:

RETROFIT JOB #: E002562-01
LSD: –
JOB No.: 050903

DRWN BY:	WBB	DESIGN BY:	A.BASHIR	DWG. No.	OP
DATE:	02/01/11	CHKD BY:	DATE:	SF-050903-70	70
SCALE:	NTS	APPVD BY:	DATE:		